


54018(12V44Ah)



Dimensions (mm)

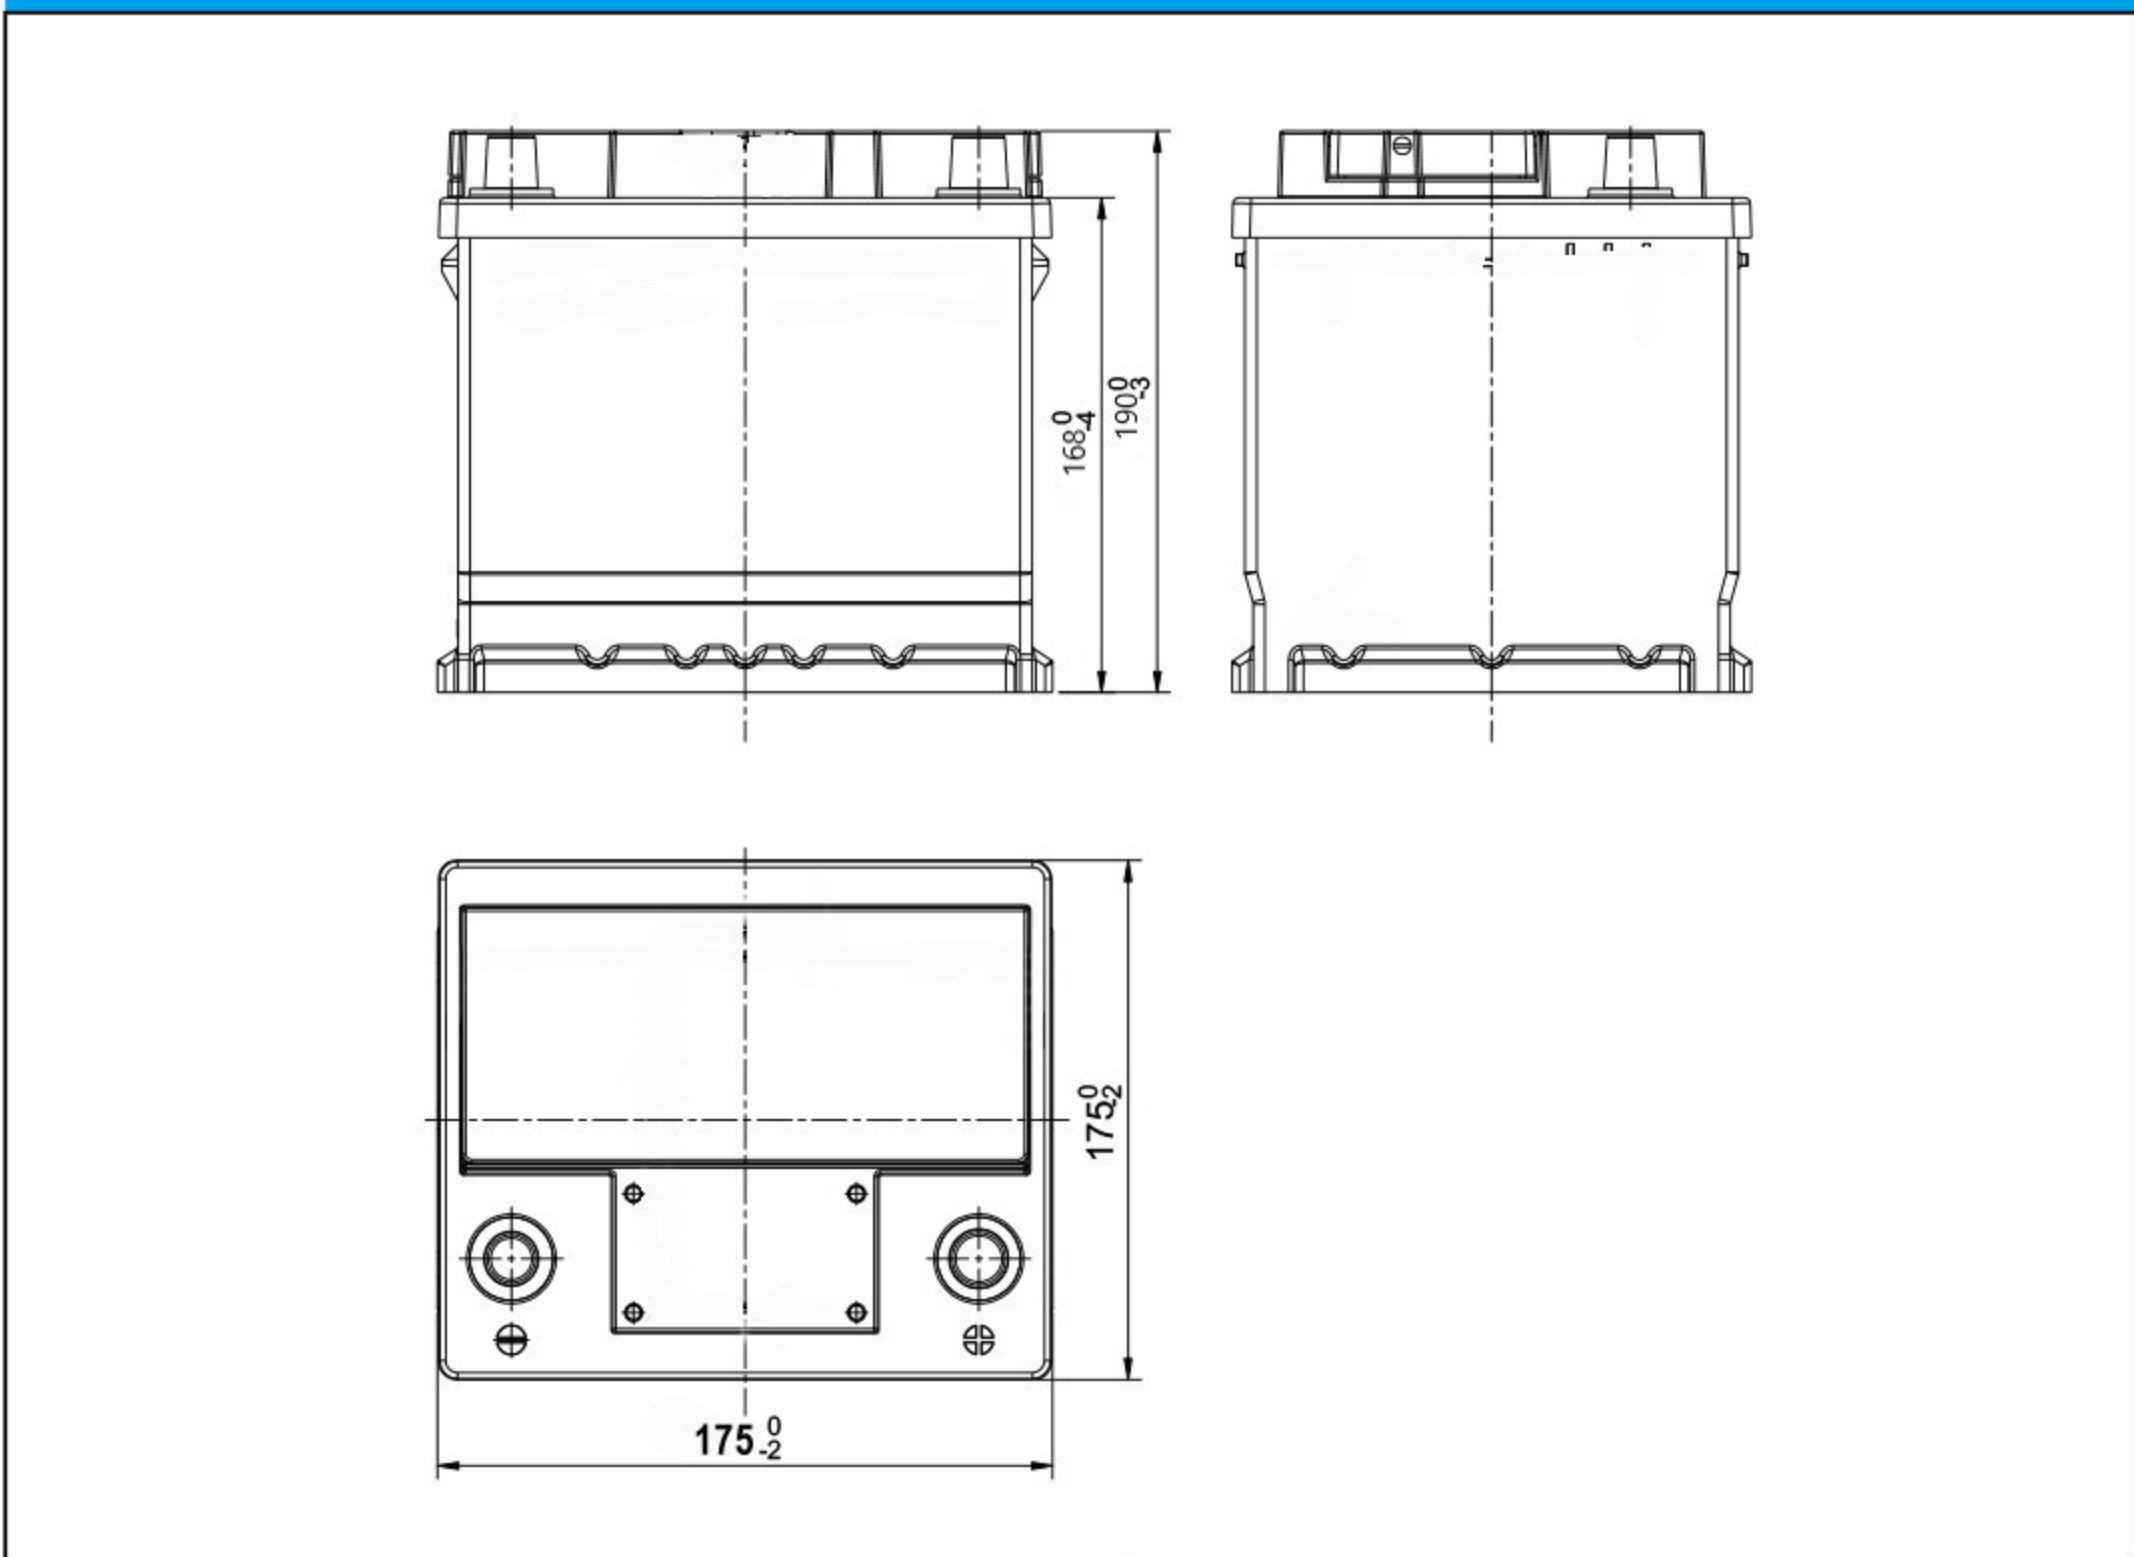


Physical Specification (mm)

Nominal Voltage	12V	
Nominal Capacity(20HR)	44Ah	
Dimension	Length	175+0/2mm(6.89inches)
	Width	175+0/-2mm(6.89inches)
	Container Height	190+0/-3mm(7.48inches)
	Total Height(with Terminal)	190+0/-3mm(7.48inches)
Weight	Approx11.5Kg(25.35lbs)	
Acid	1.280±0.015g/cm ³ (25°C)	
Standard Terminal	1	
Cell layout	0	
Hold-Down	B13	
Cell plate qty	/	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	Black-PP Material	
QTY/PLT/layer	/	

Electrical Specification

Rated Capacity	20 hour rate(2.2A)	44Ah
Reserve Capacity		68min
Cold Cranking Performance Amps@0°F(-18°C)		370A


Discharge Characteristics(25°C,77°F)

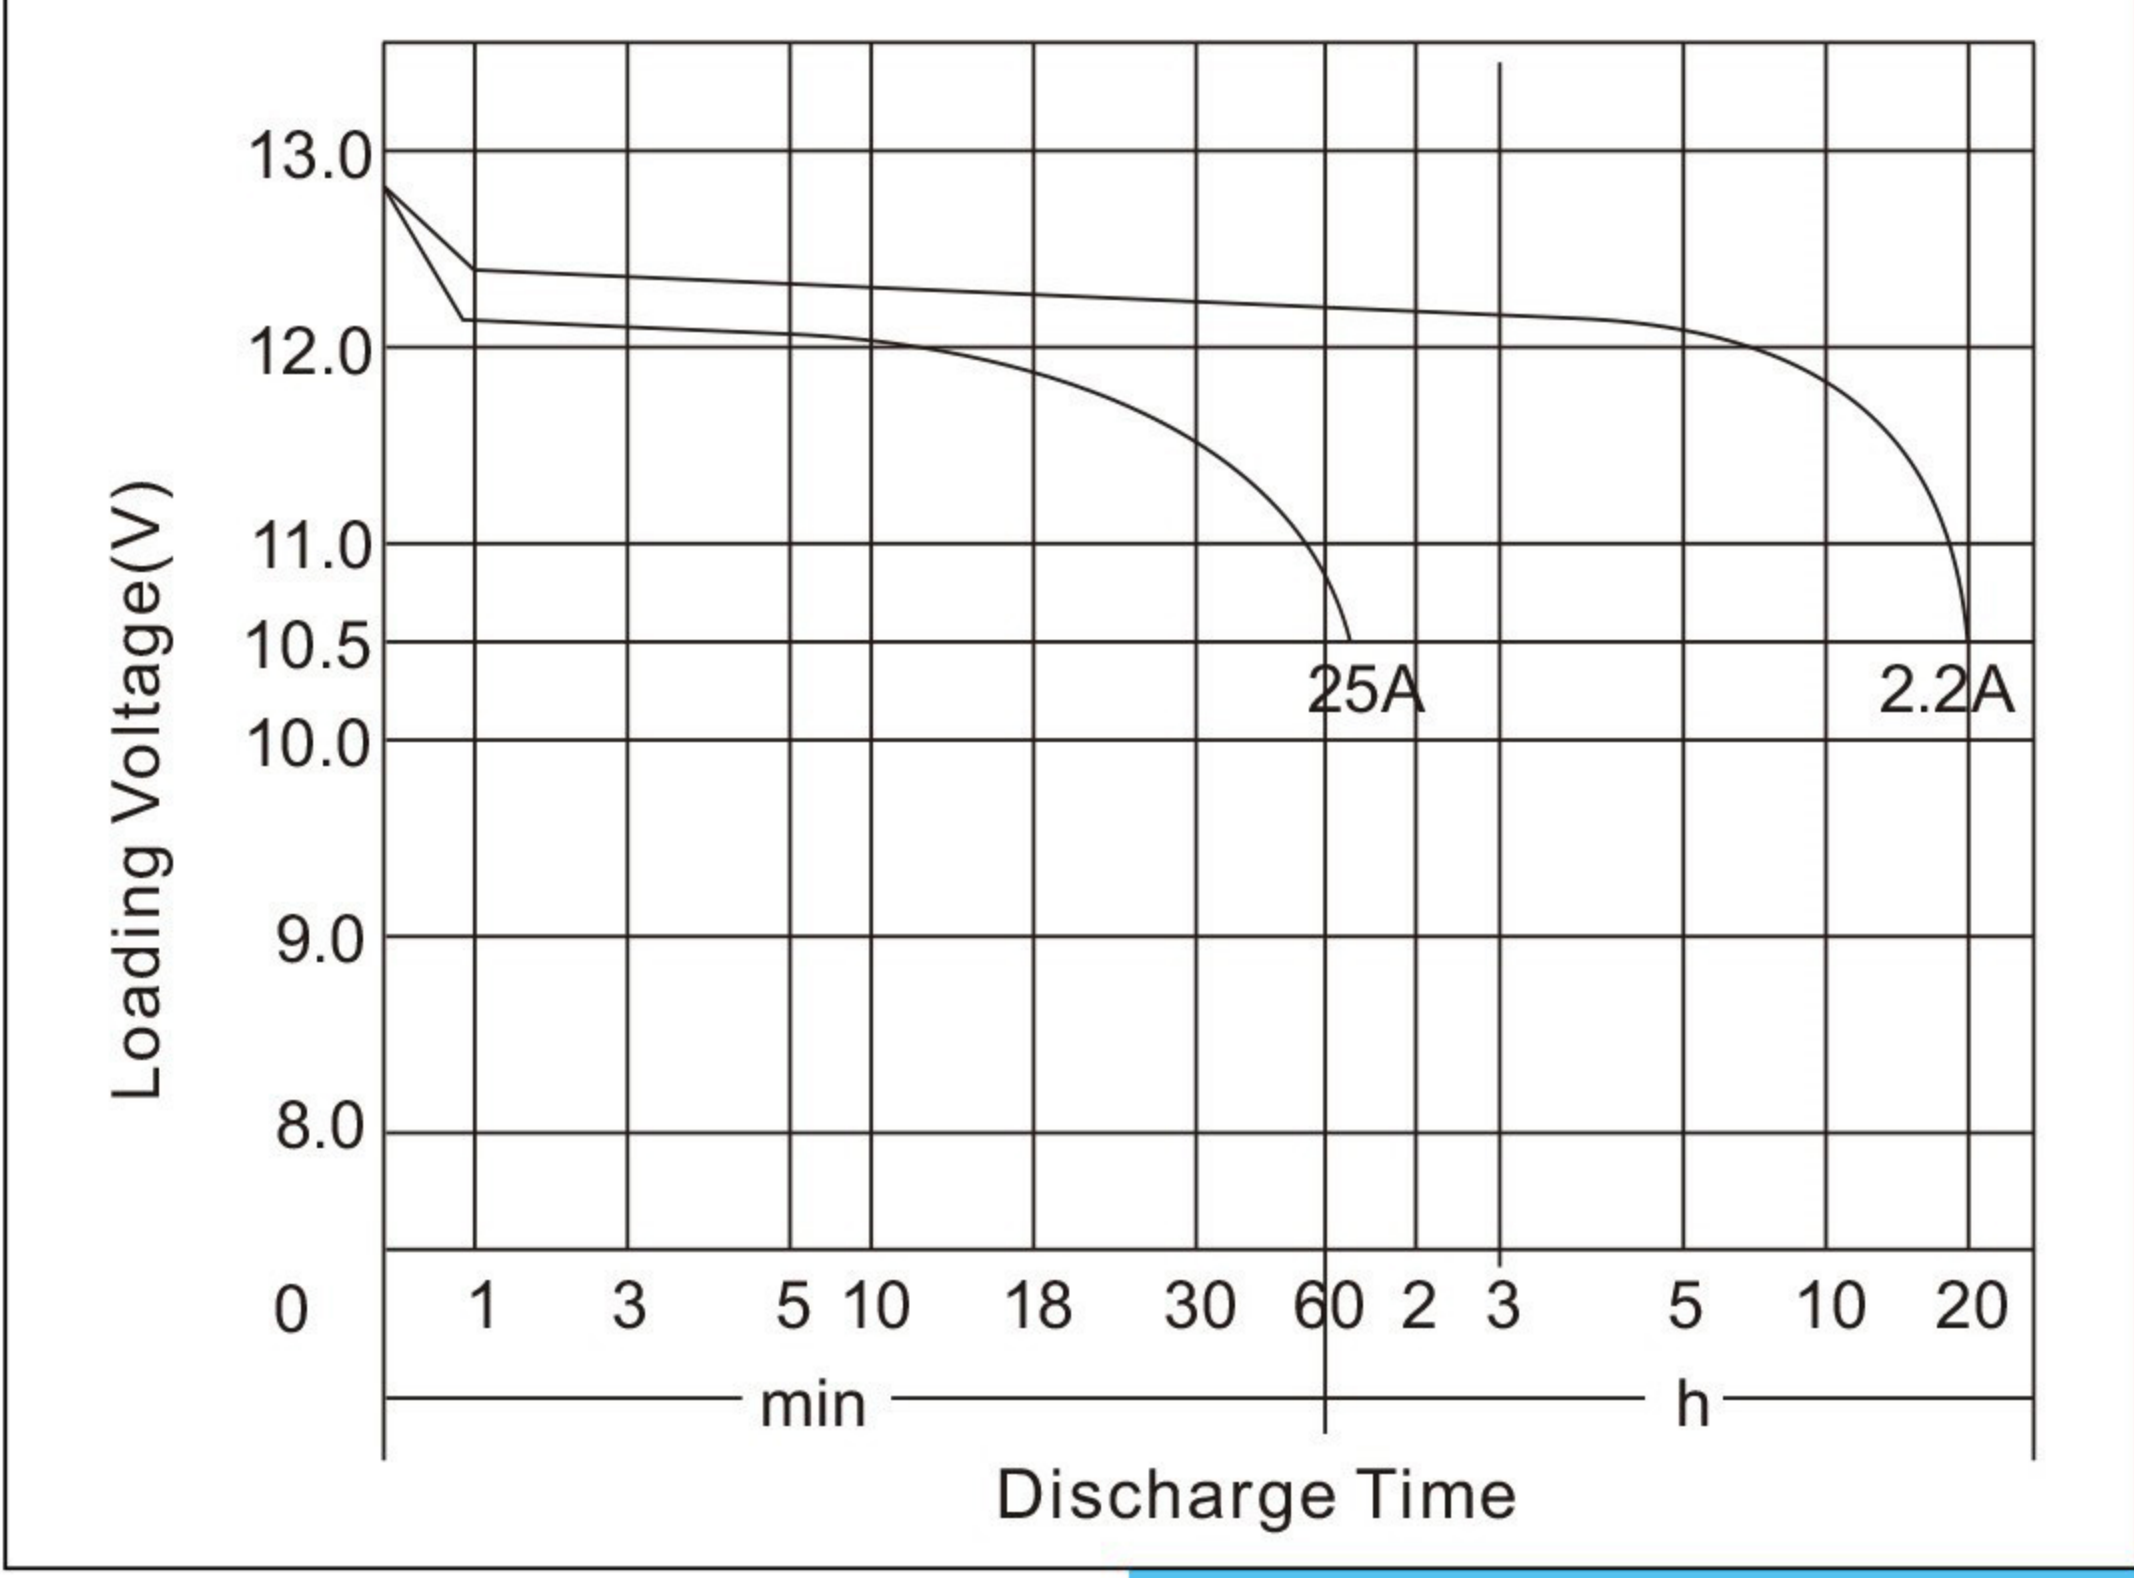


Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Cell Layout

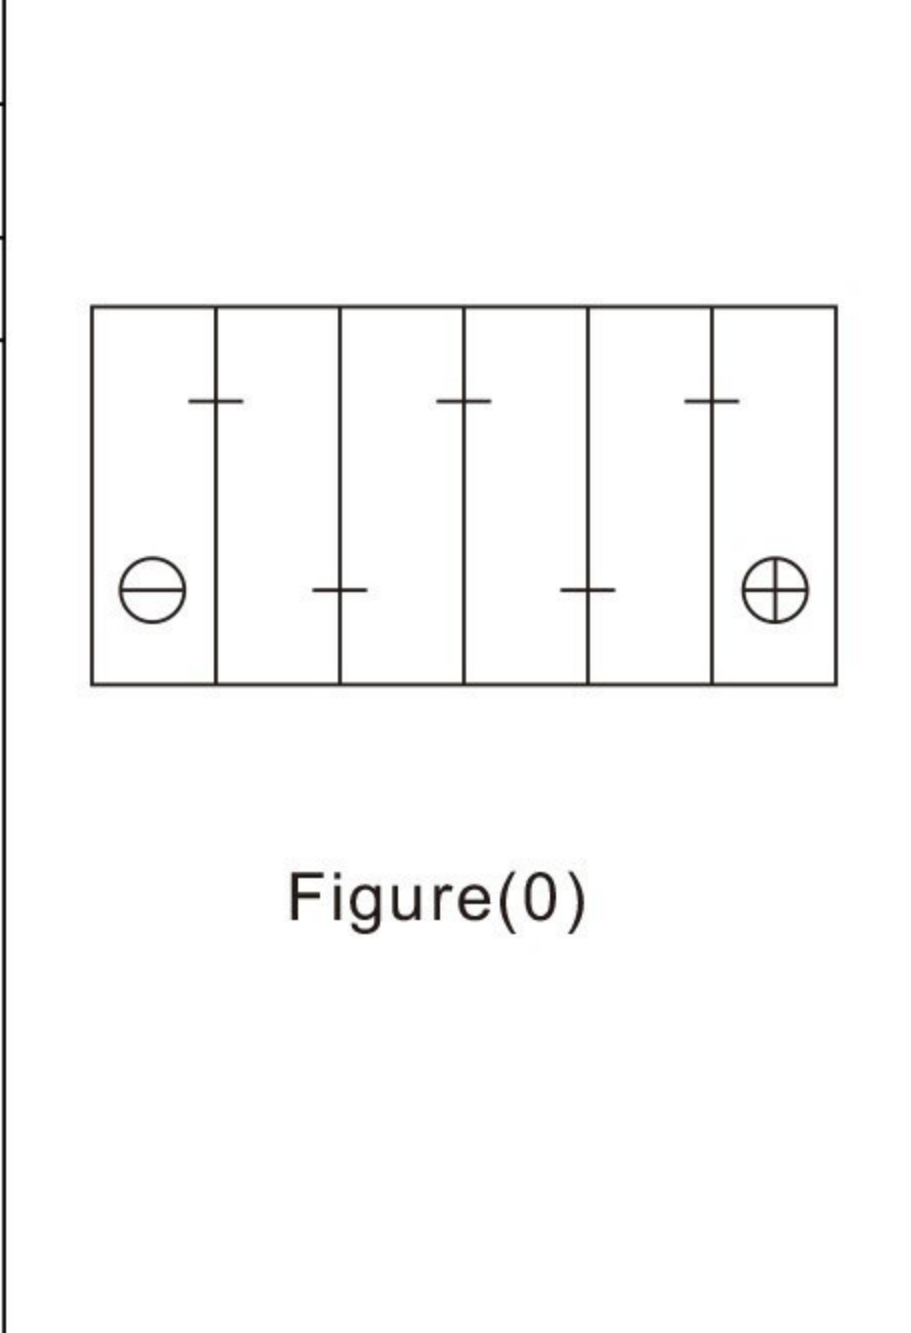

Discharge Characteristics(-18°C,0°F)

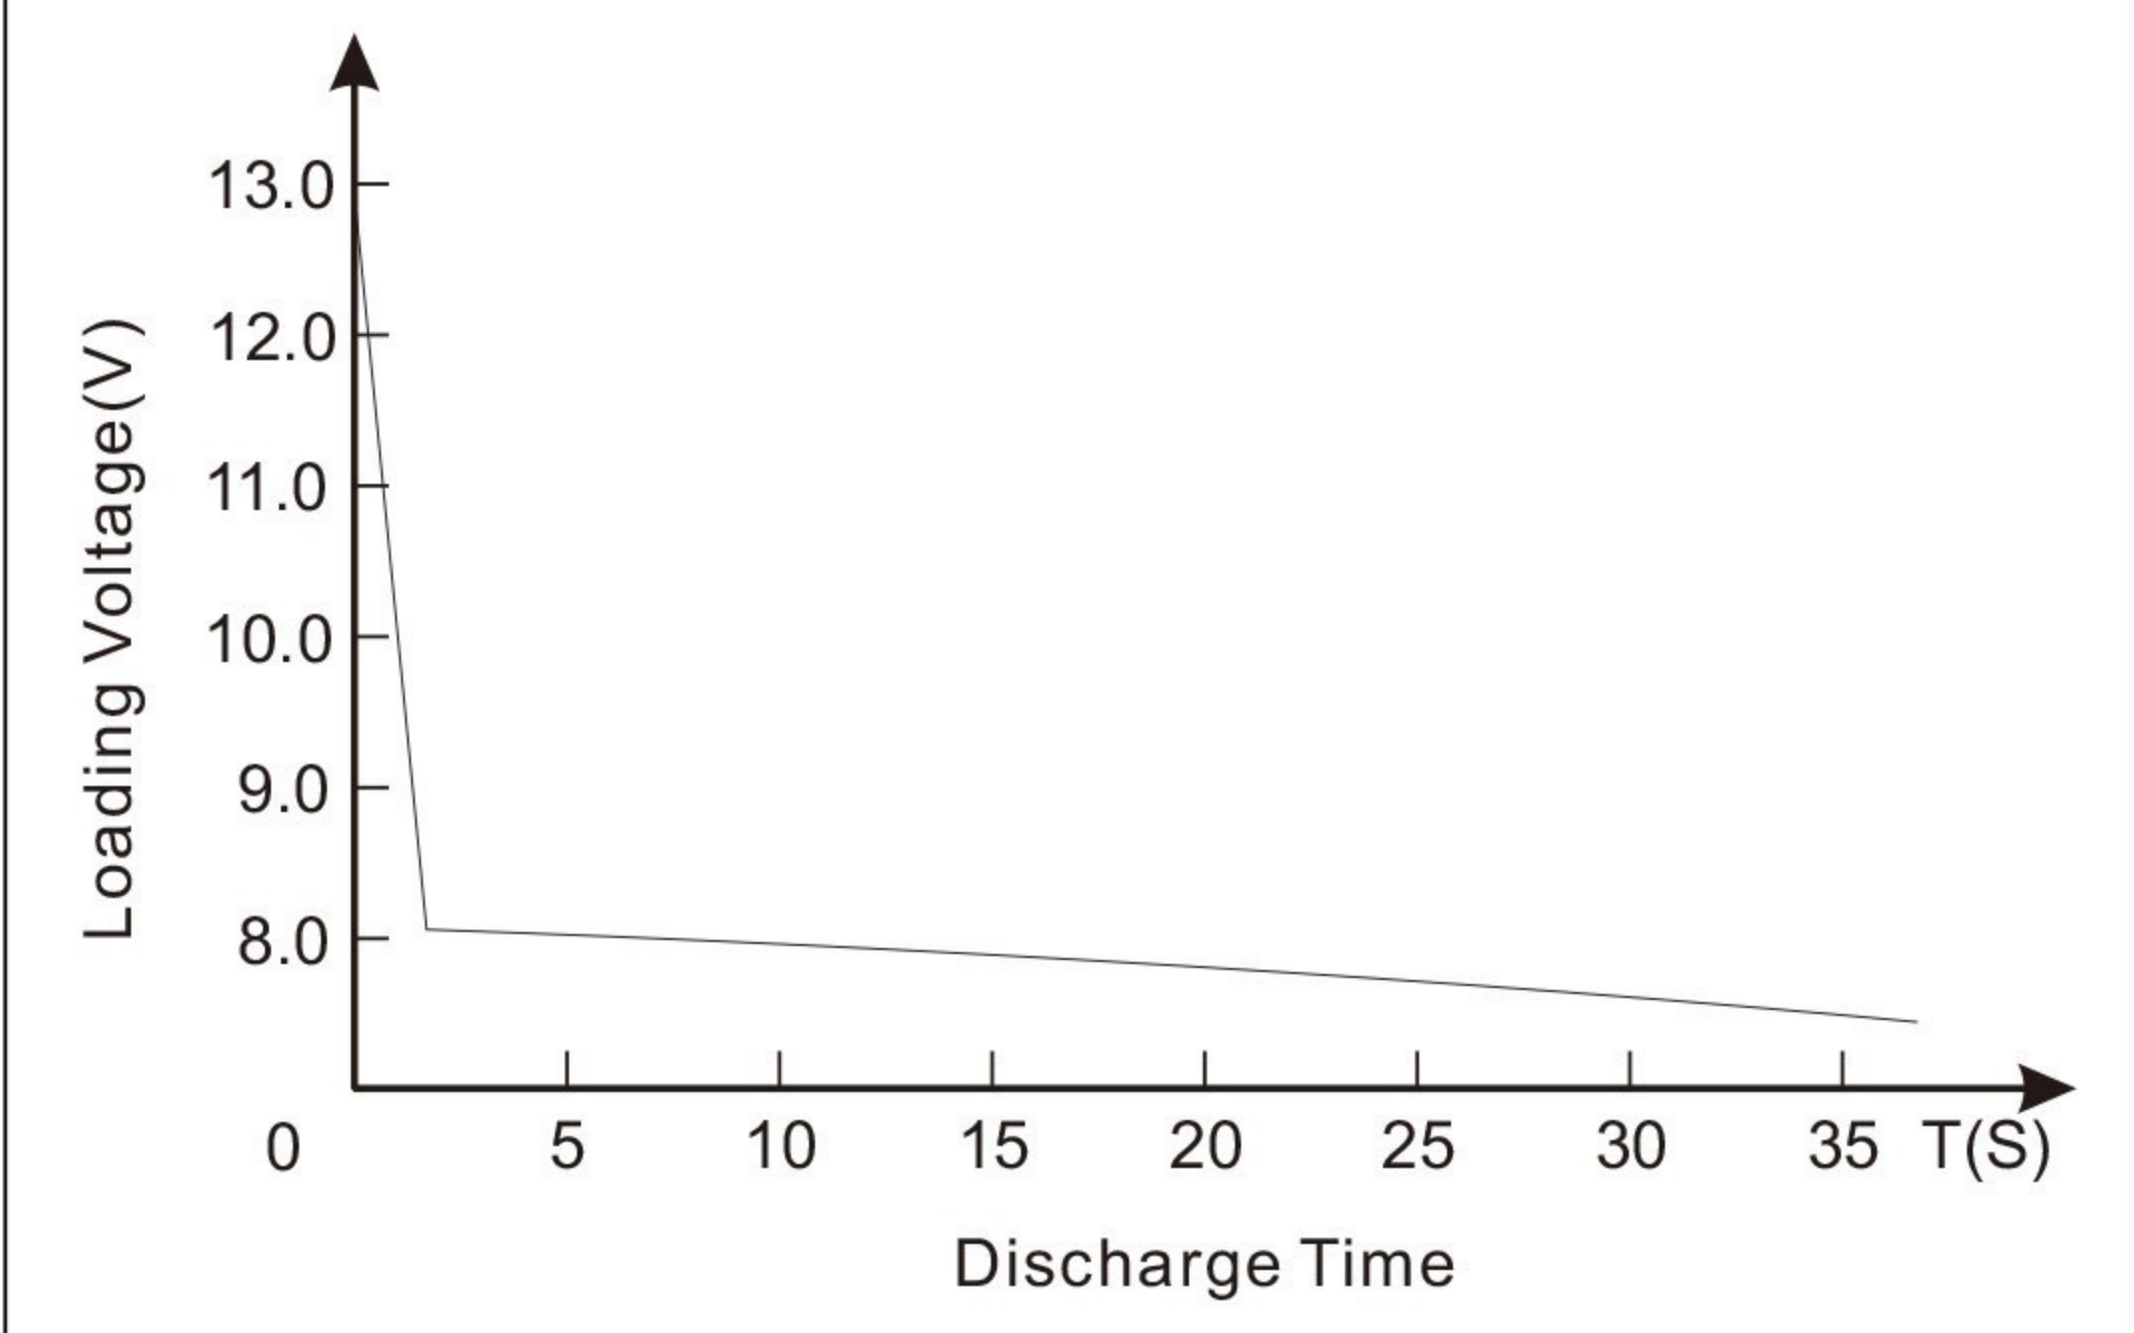

*Values are subject to variation of +/- 5% in normal manufacturing processes.
*Technical specifications and the product line above could be changed without prior notice.