




DYN1274 [12V74Ah]



Dimensions (mm)

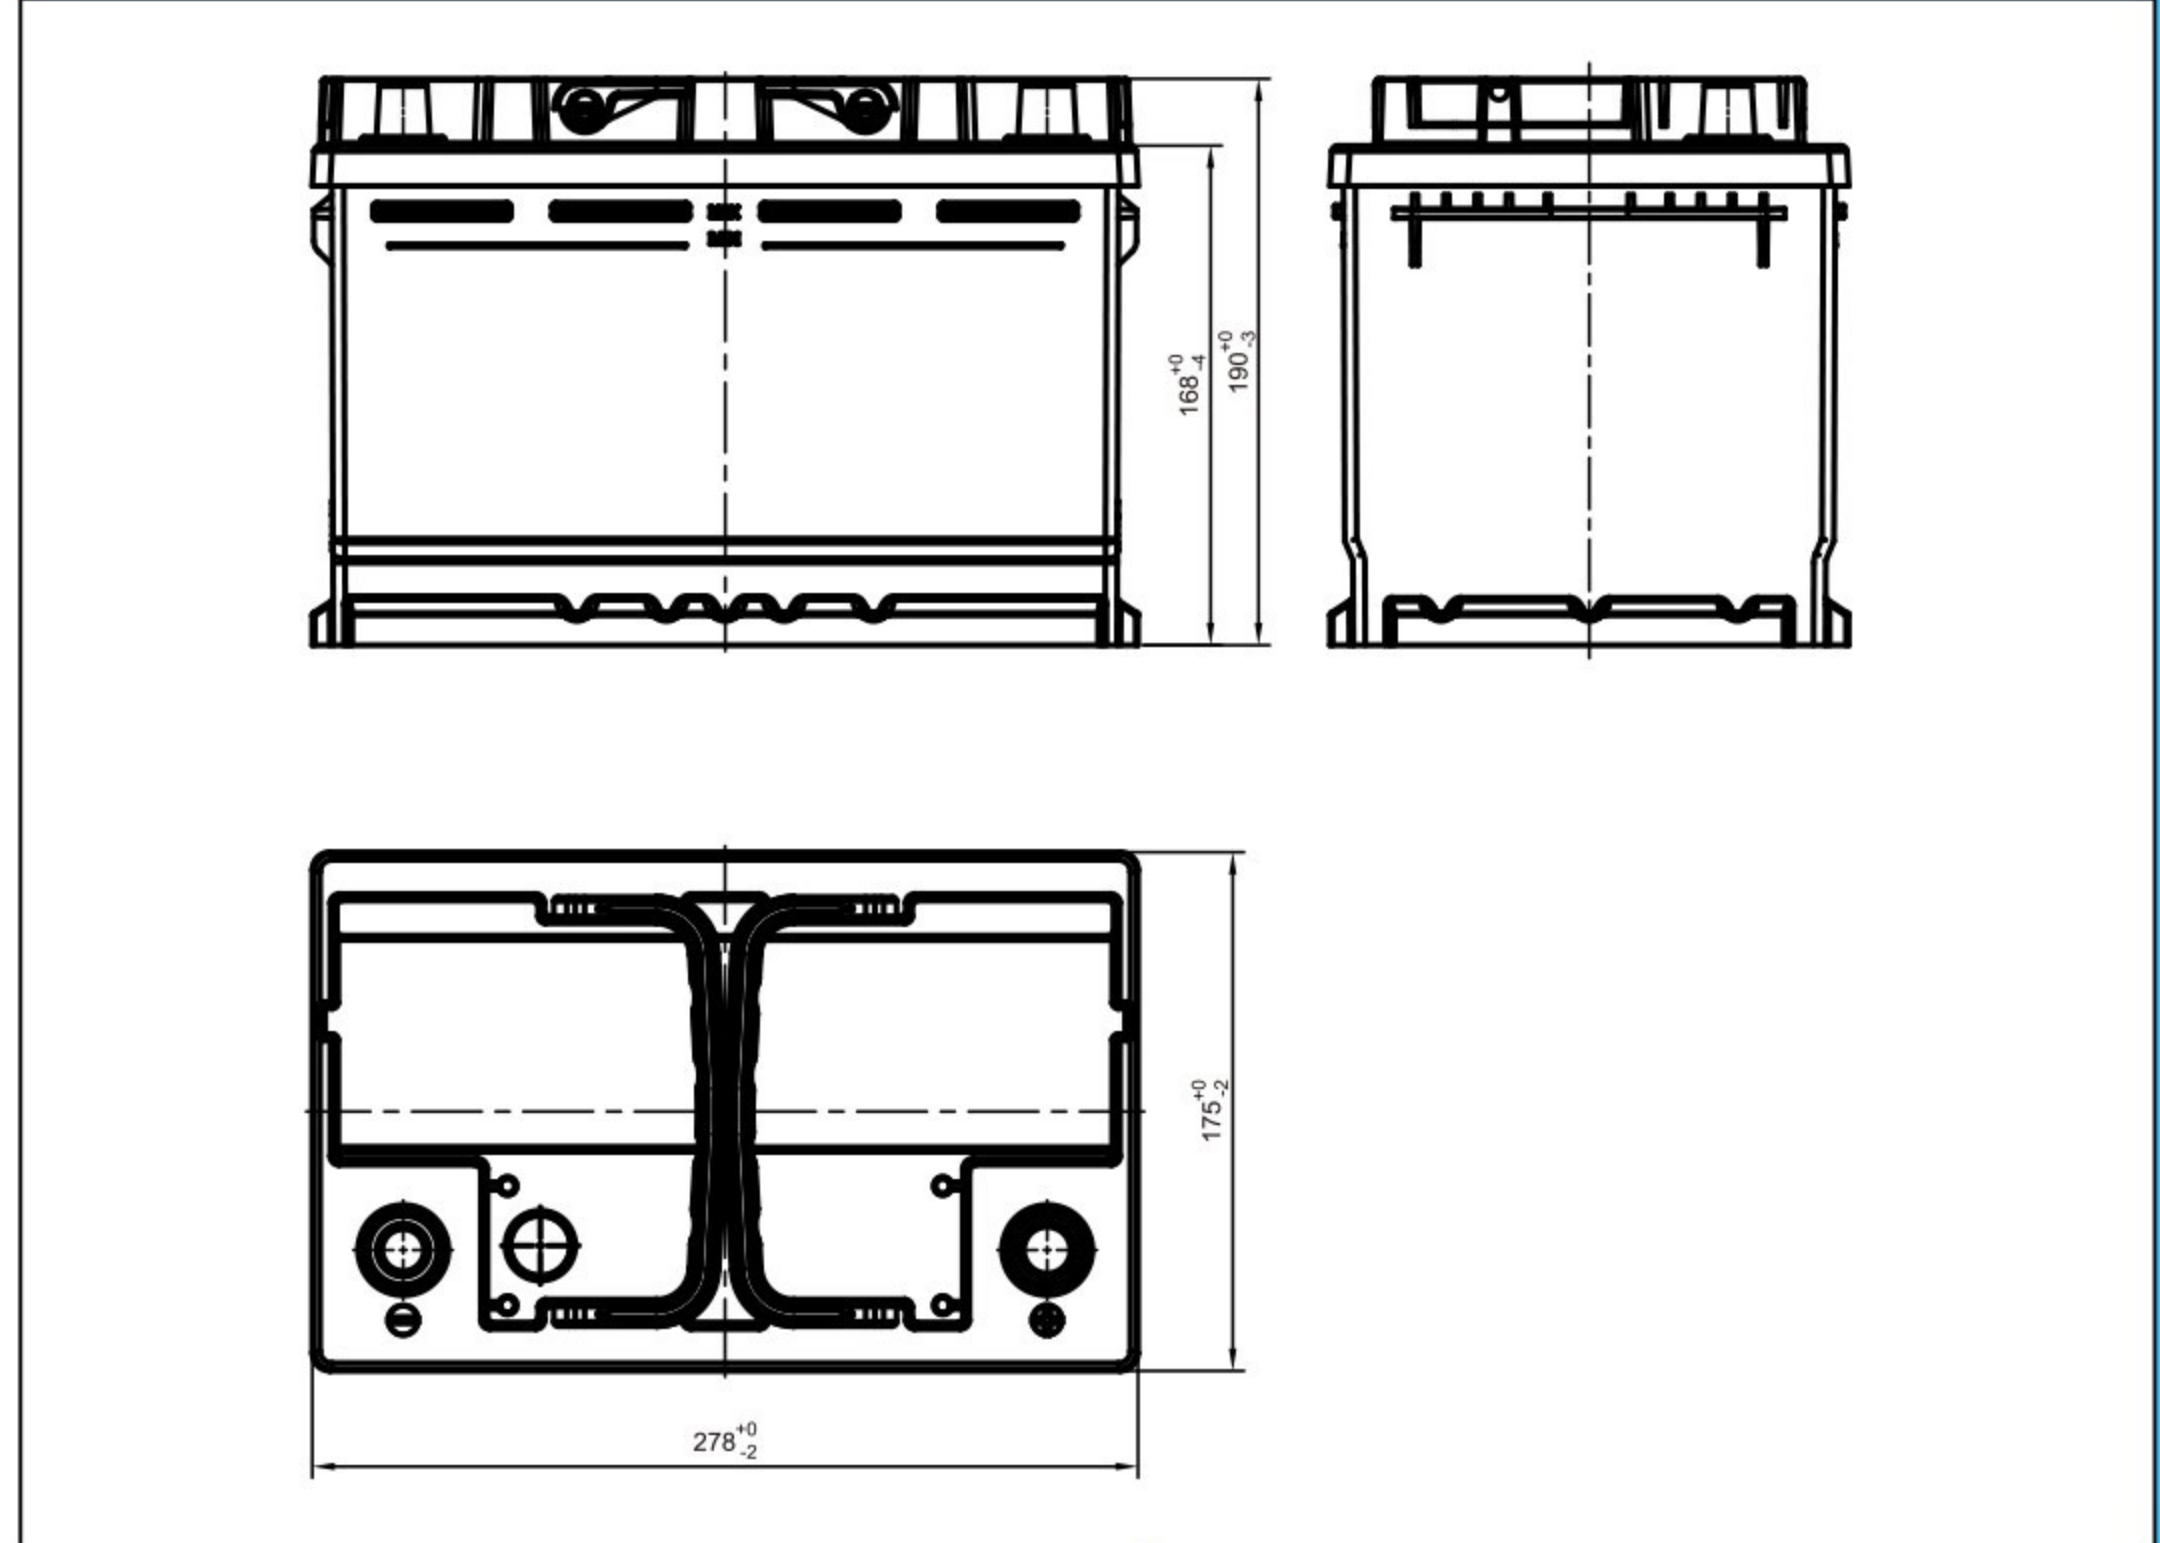


Physical Specification (mm)

| | | |
|------------------------|-----------------------------|-------------------------|
| Nominal Voltage | | 12V |
| Nominal Capacity(20HR) | | 74Ah |
| Dimension | Length | 278+0/-2mm(10.94inches) |
| | Width | 175+0/-2mm(6.89inches) |
| | Container Height | 190+0/-3mm(7.48inches) |
| | Total Height(with Terminal) | 190+0/-3mm(7.48inches) |
| Weight | | Approx16.3Kg(35.94lbs) |
| Acid | | 1280±0.015g/cm3(25°C) |
| Standard Terminal | | 1 |
| Cell layout | | 0 |
| Hold-Down | | B13 |
| Cell plate qty | | / |
| Case | | Black-PP Material |
| Cover | | Black-PP Material |
| Handle | | Black-PP Material |
| QTY/PLT/layer | | / |


Electrical Specification

| | | |
|---|--------------------|--------|
| Rated Capacity | 20 hour rate(3.6A) | 74Ah |
| Reserve Capacity | | 122min |
| Cold Cranking Performance Amps@0°F(-18°C) | | 610A |


Discharge Characteristics(25°C,77°F)

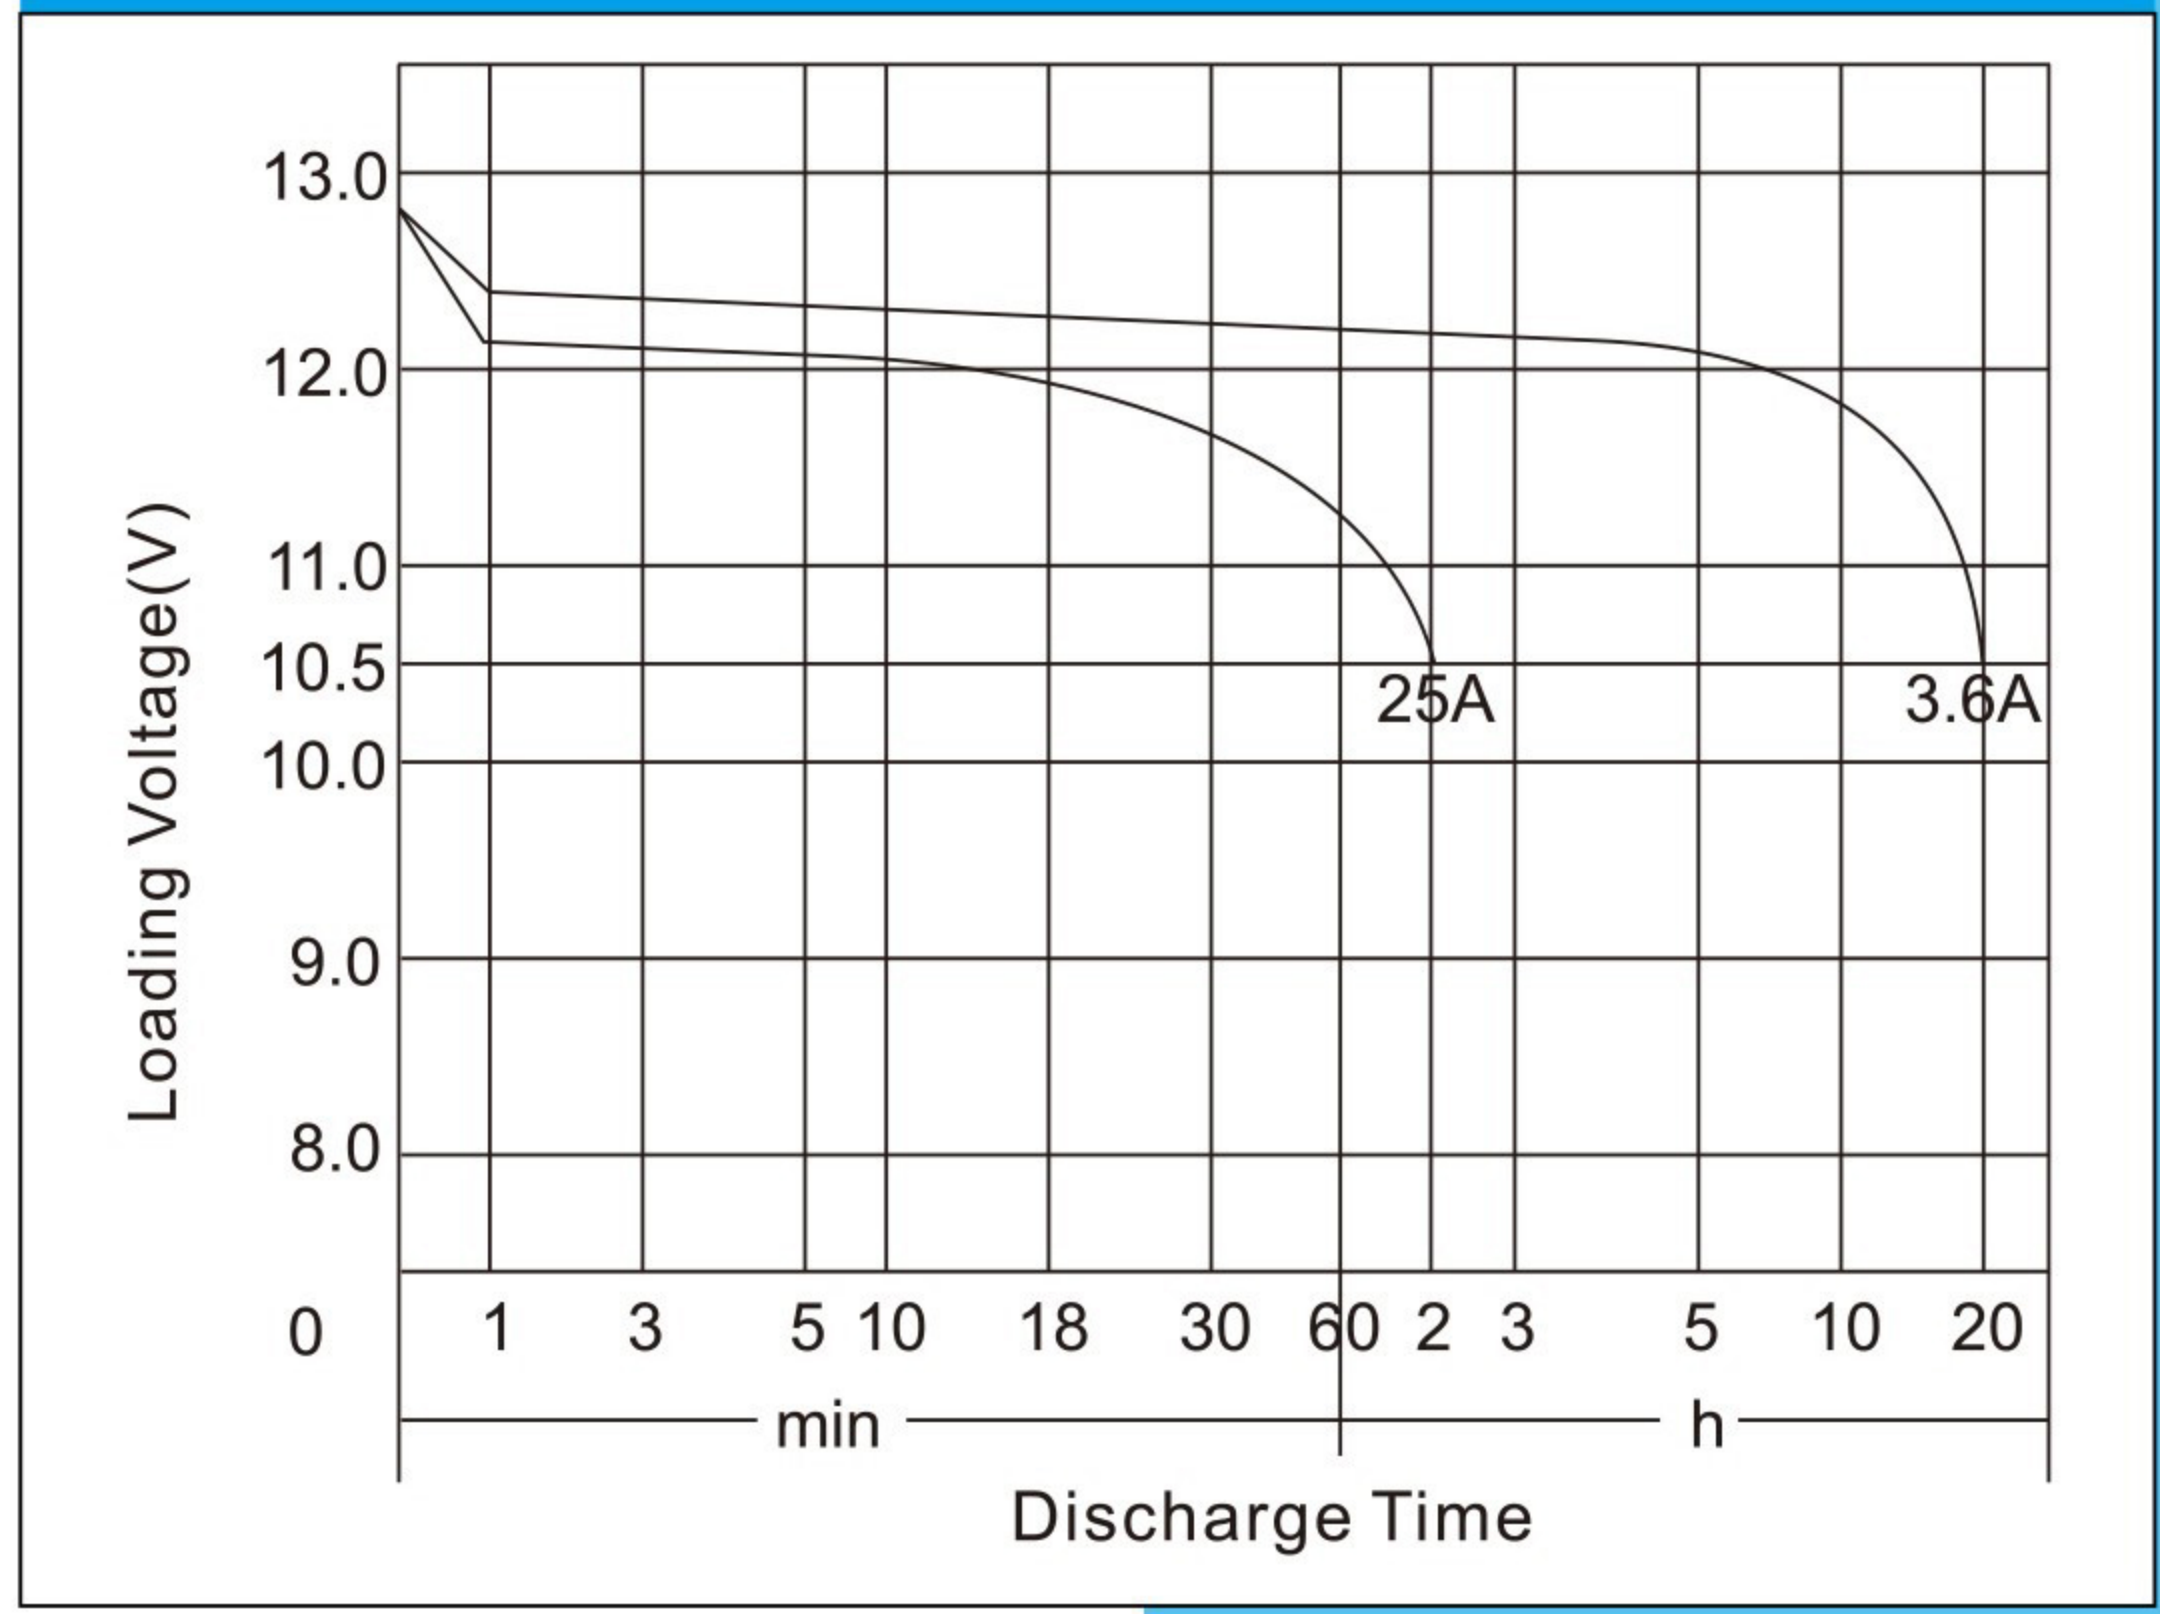


Standard Terminal (mm)

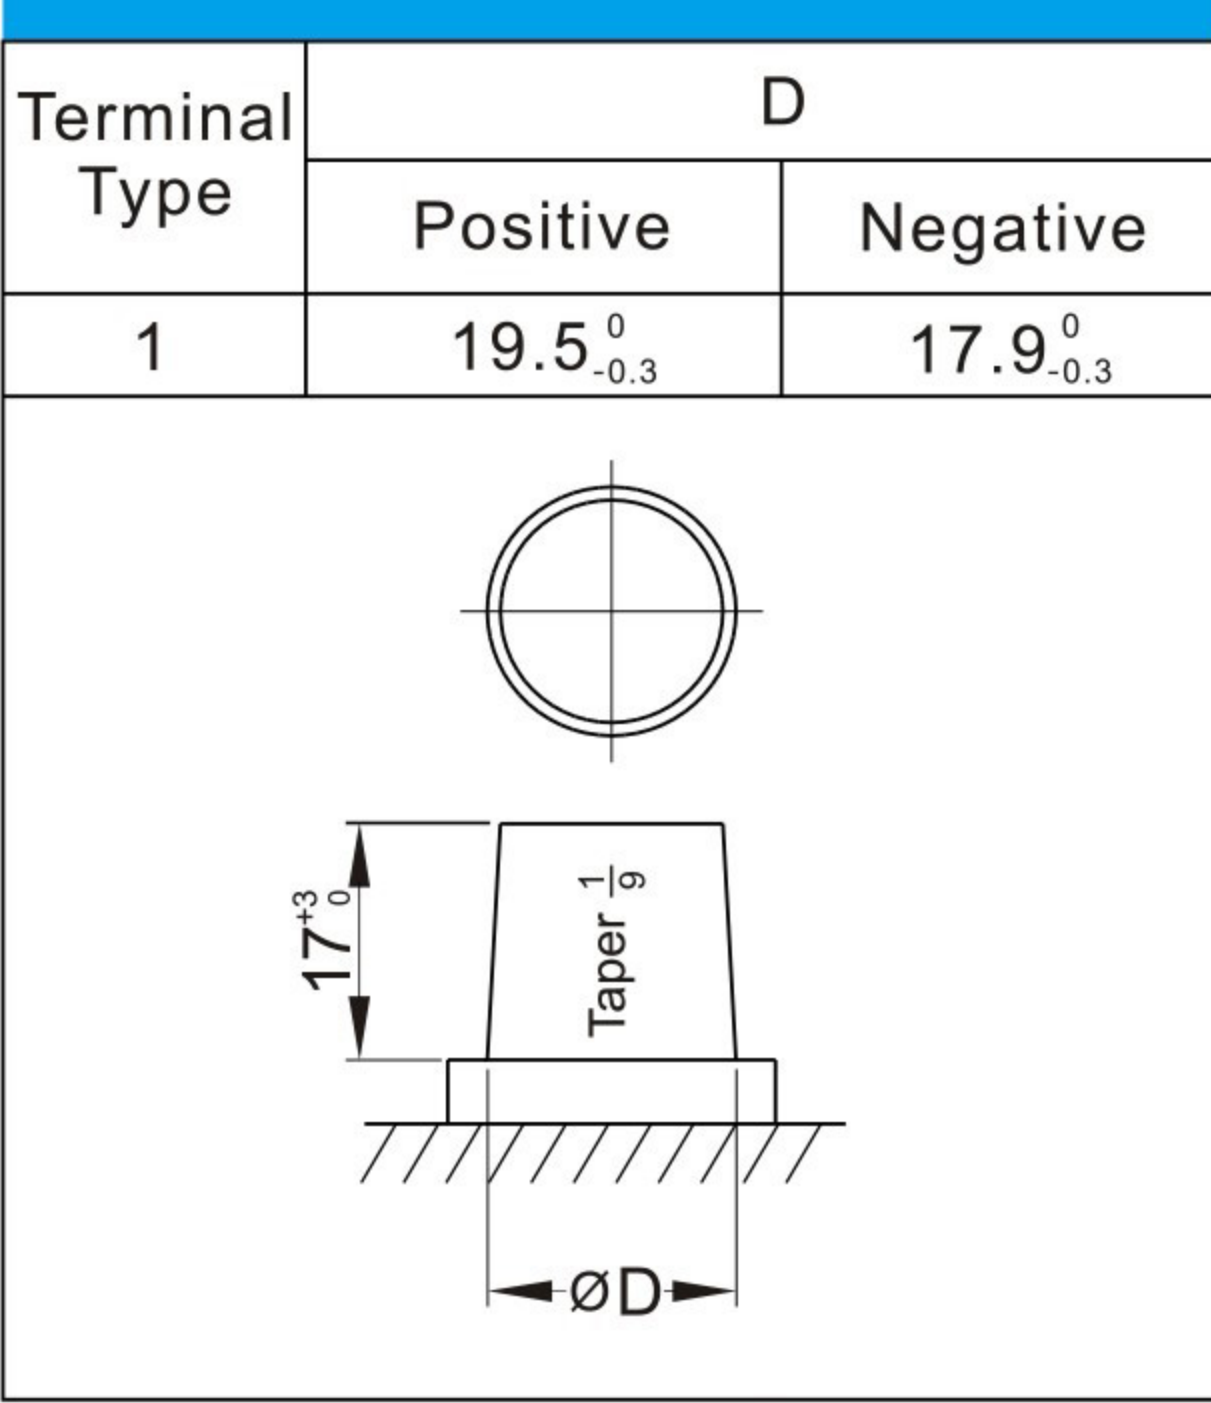

Cell Layout

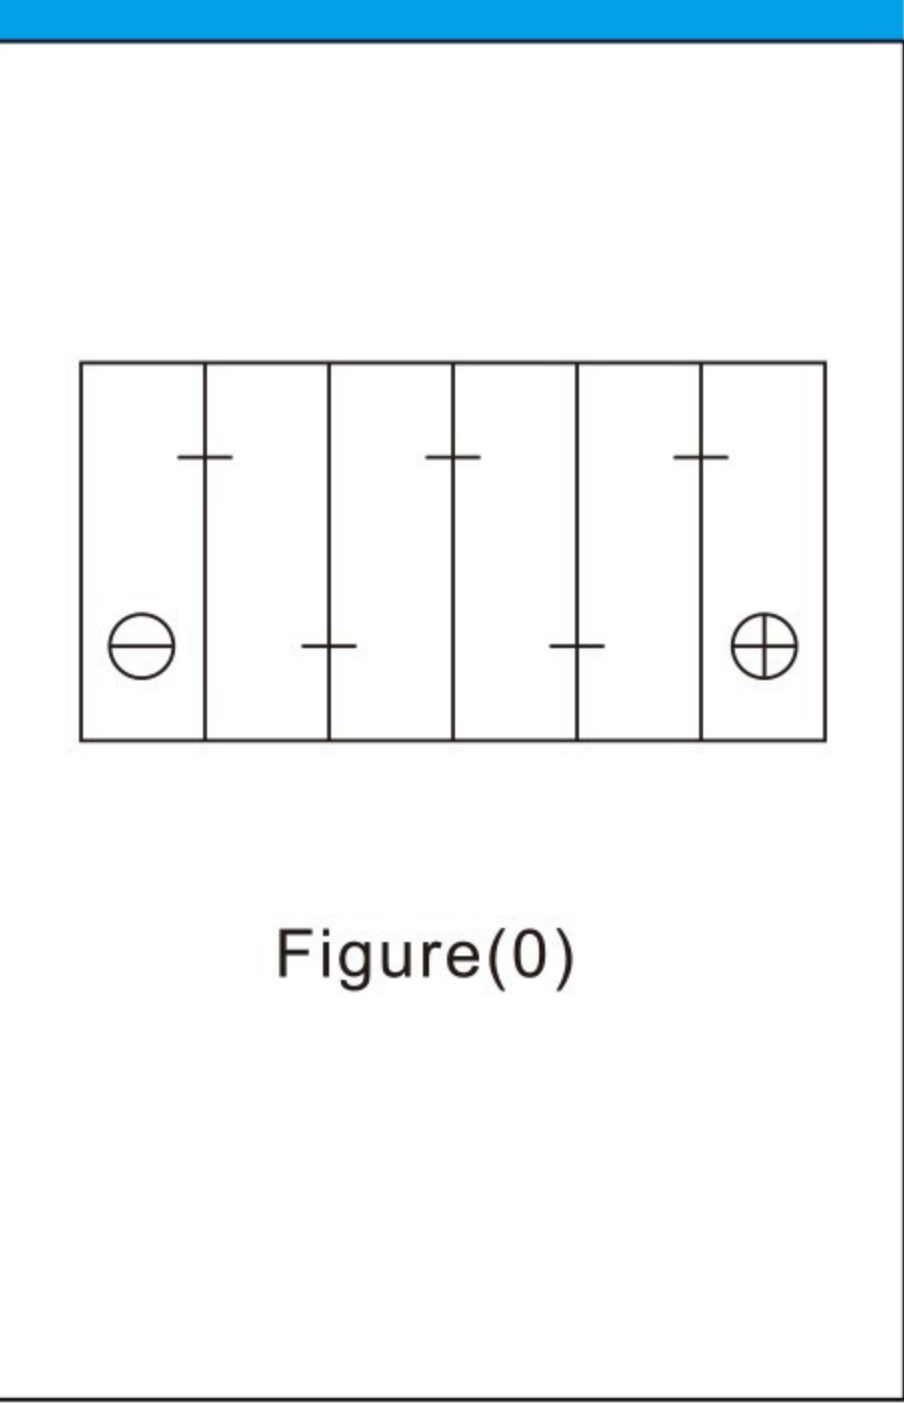

Discharge Characteristics(-18°C,0°F)

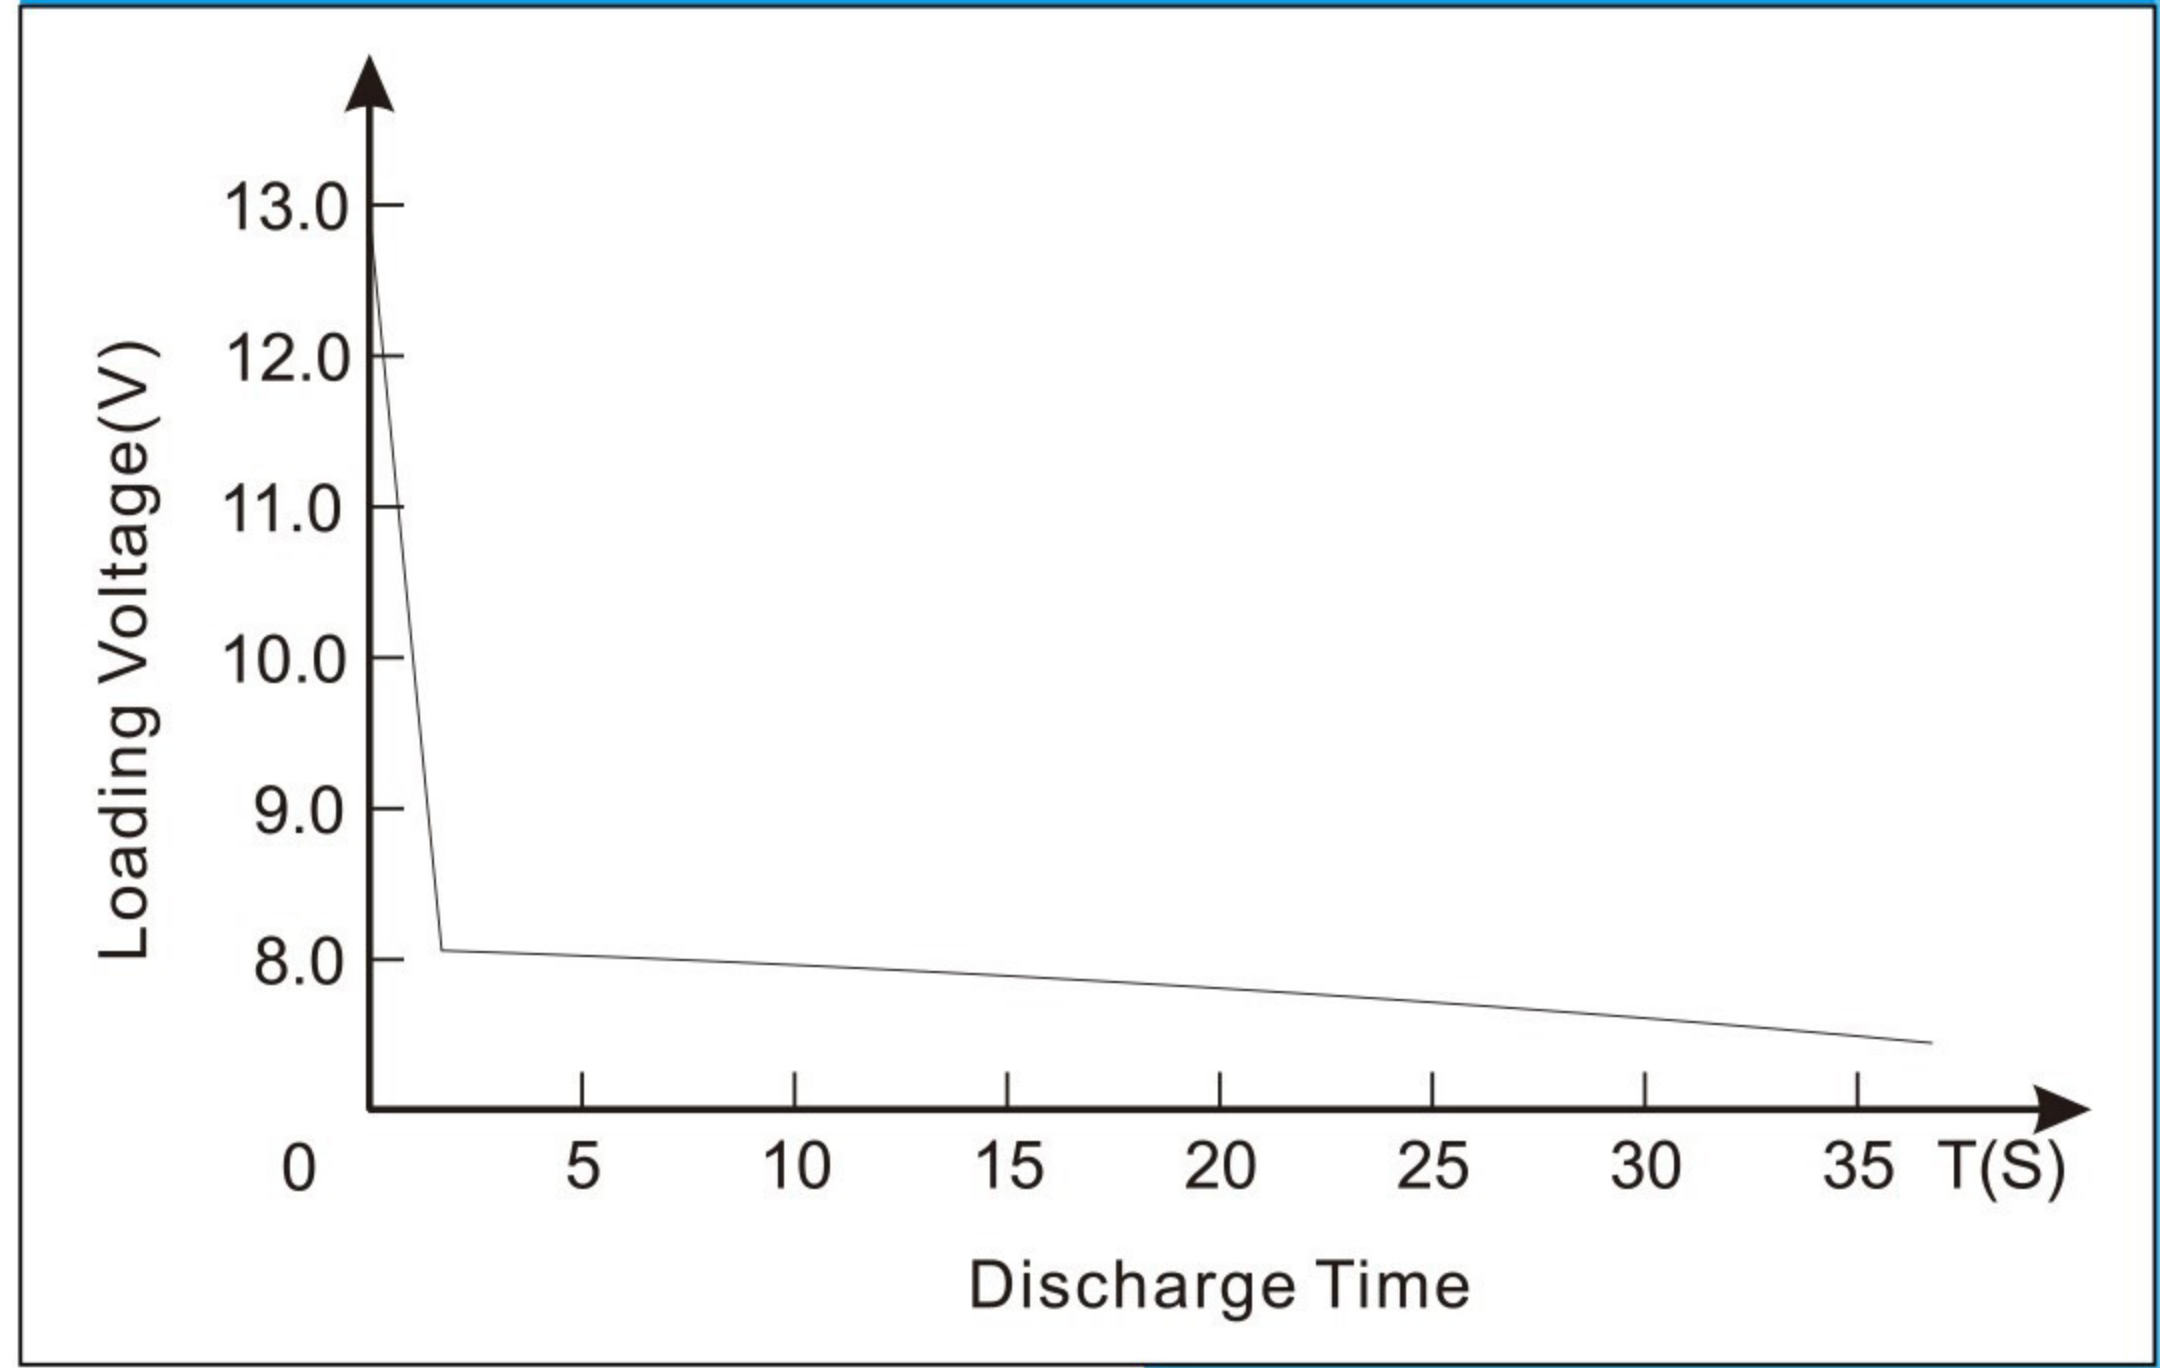

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.