


31-1000[12V125Ah]

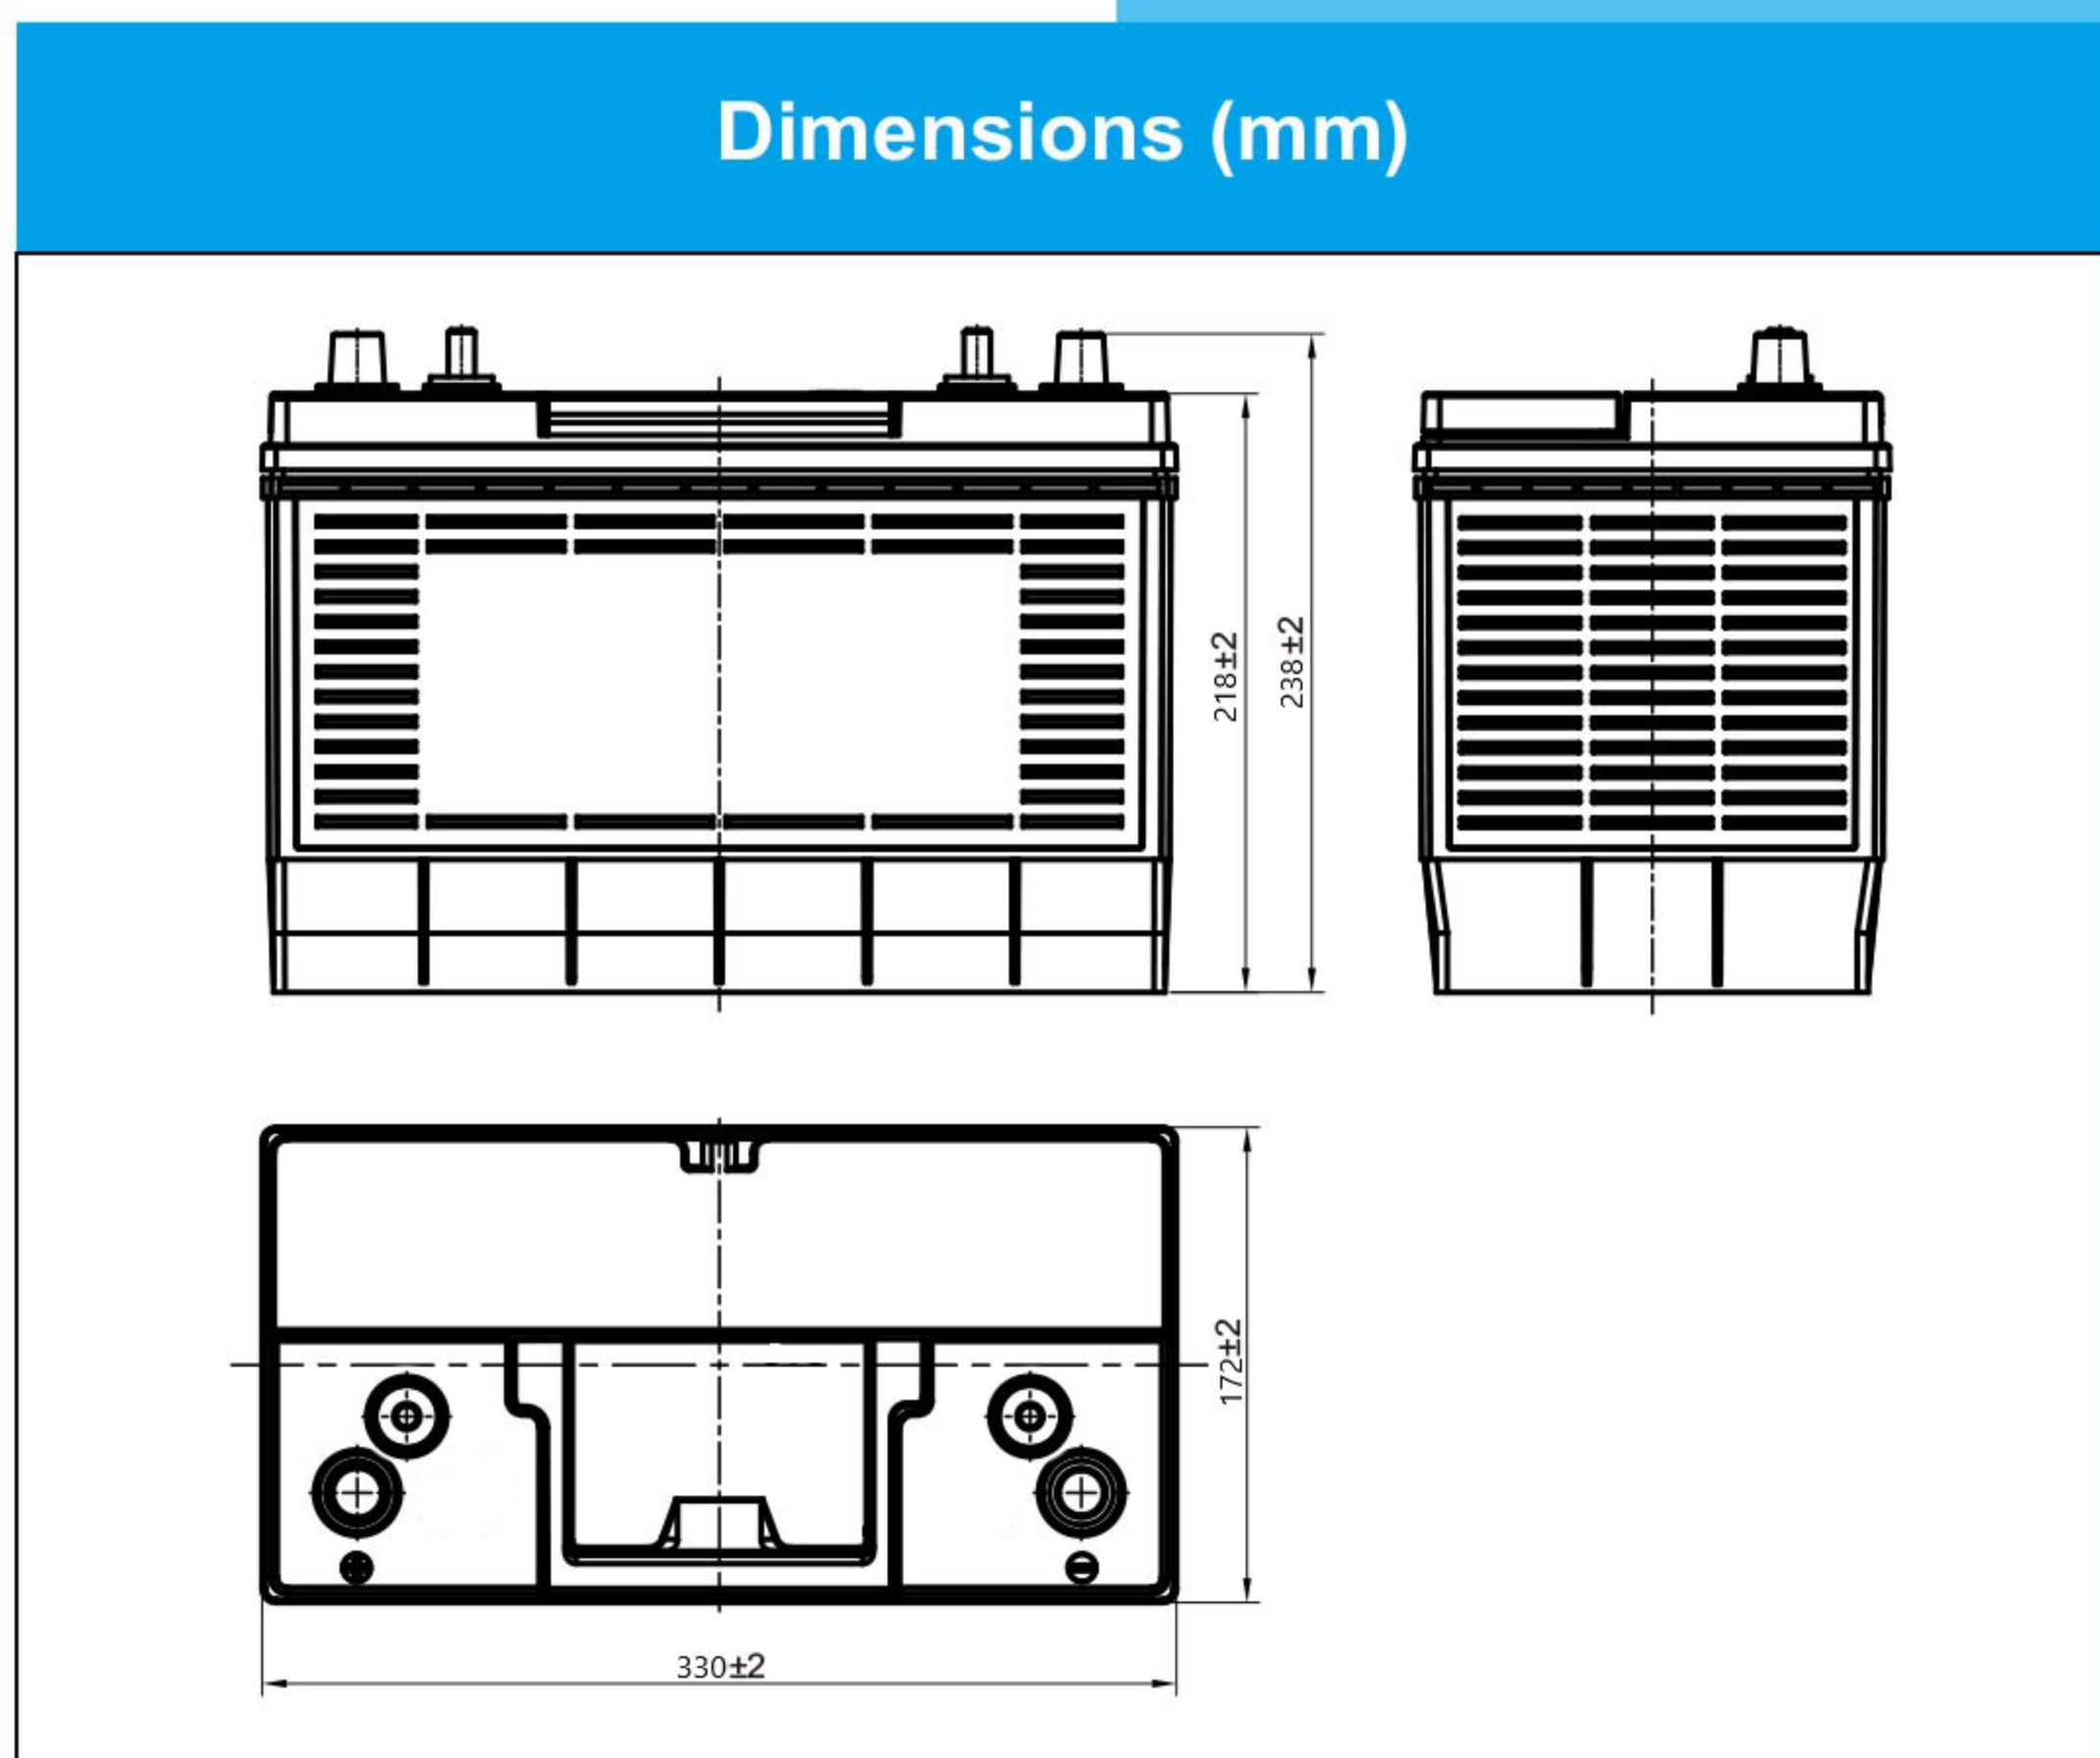


Physical Specification (mm)


Nominal Voltage	12V	
Nominal Capacity(20HR)	125Ah	
Dimension	Length	330 ± 2mm(12.95inches)
	Width	172 ± 2mm(6.73inches)
	Container Height	218 ± 2mm(8.48inches)
	Total Height(with Terminal)	238 ± 2mm(9.33inches)
Weight	Approx25.8Kg(56.88lbs)	
Acid	1.280 ± 0.015g/cm ³ (25°C)	
Standard Terminal	12	
Cell layout	1	
Hold-Down	B0	
Cell plate qty	/	
Case	Gray-PP Material	
Cover	Gray-PP Material	
Handle	Gray-PP Material	
QTY/PLT/layer	/	

Electrical Specification

Rated Capacity	20 hour rate(4.0A)	125Ah
Reserve Capacity		190min
Cold Cranking Performance Amps@0°F(-18°C)		950Ah

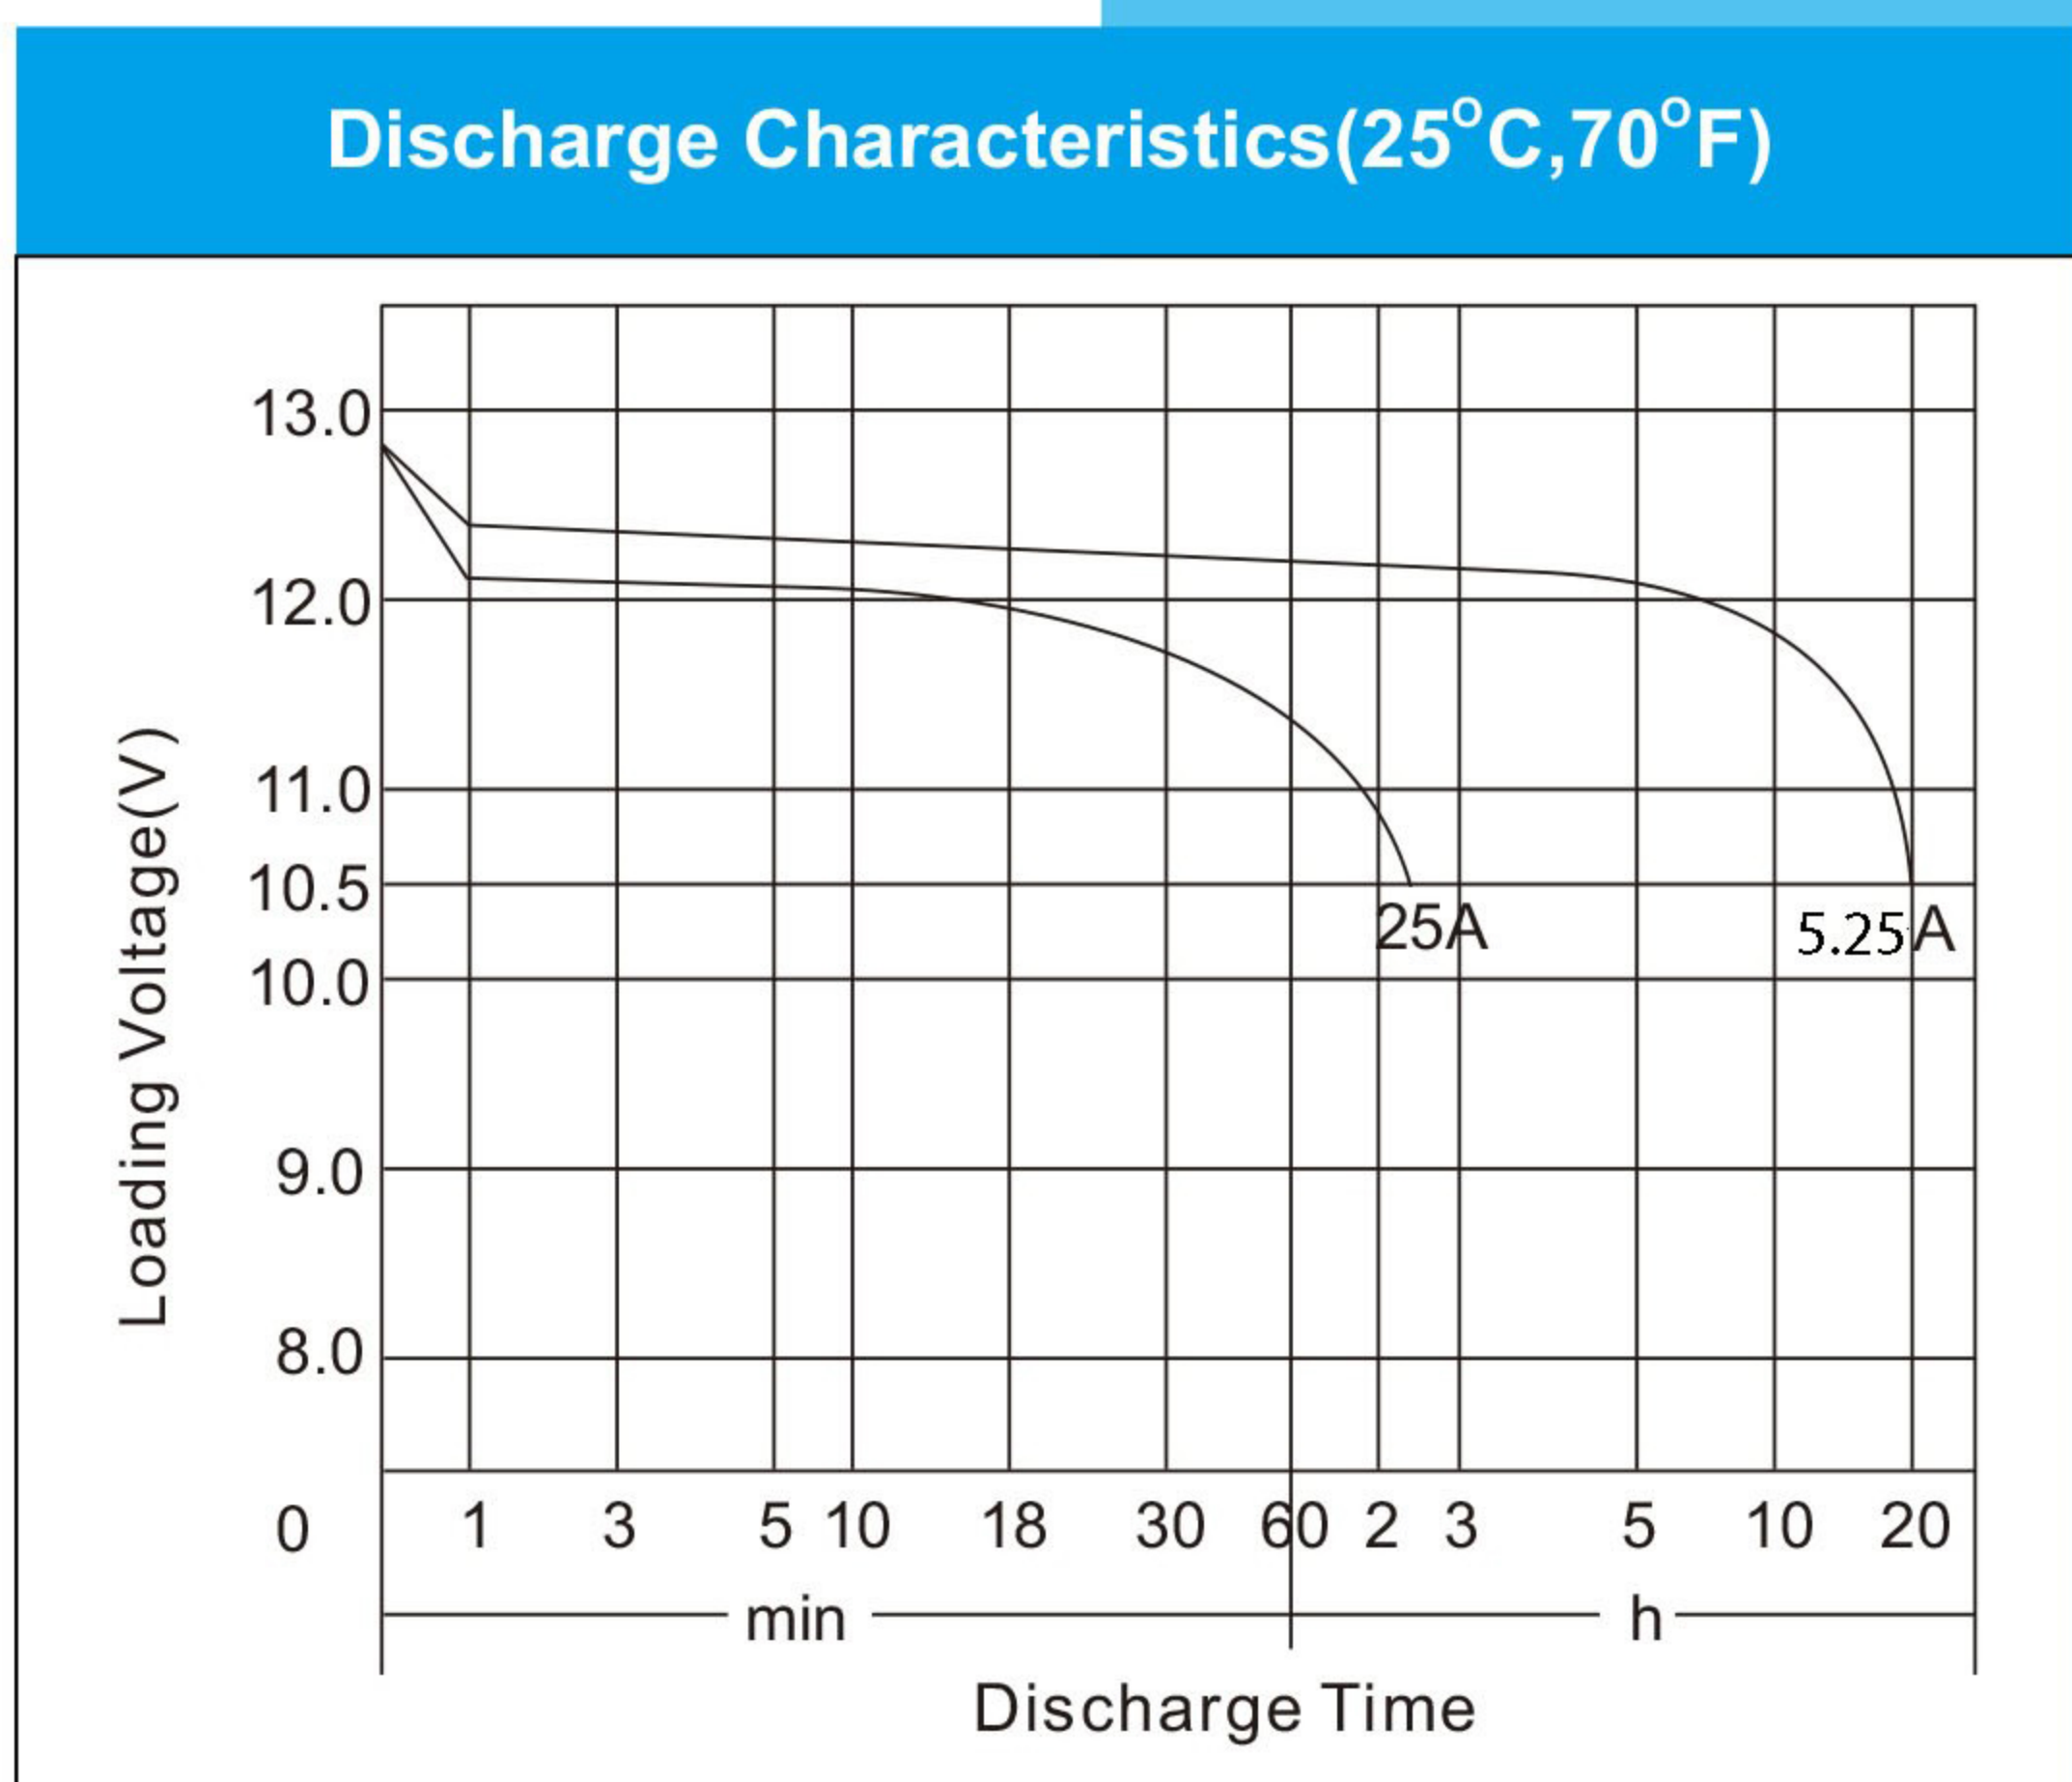

Standard Terminal (mm)	Cell Layout
Terminal Type	12
Positive	
Negative	
Figure(1)	

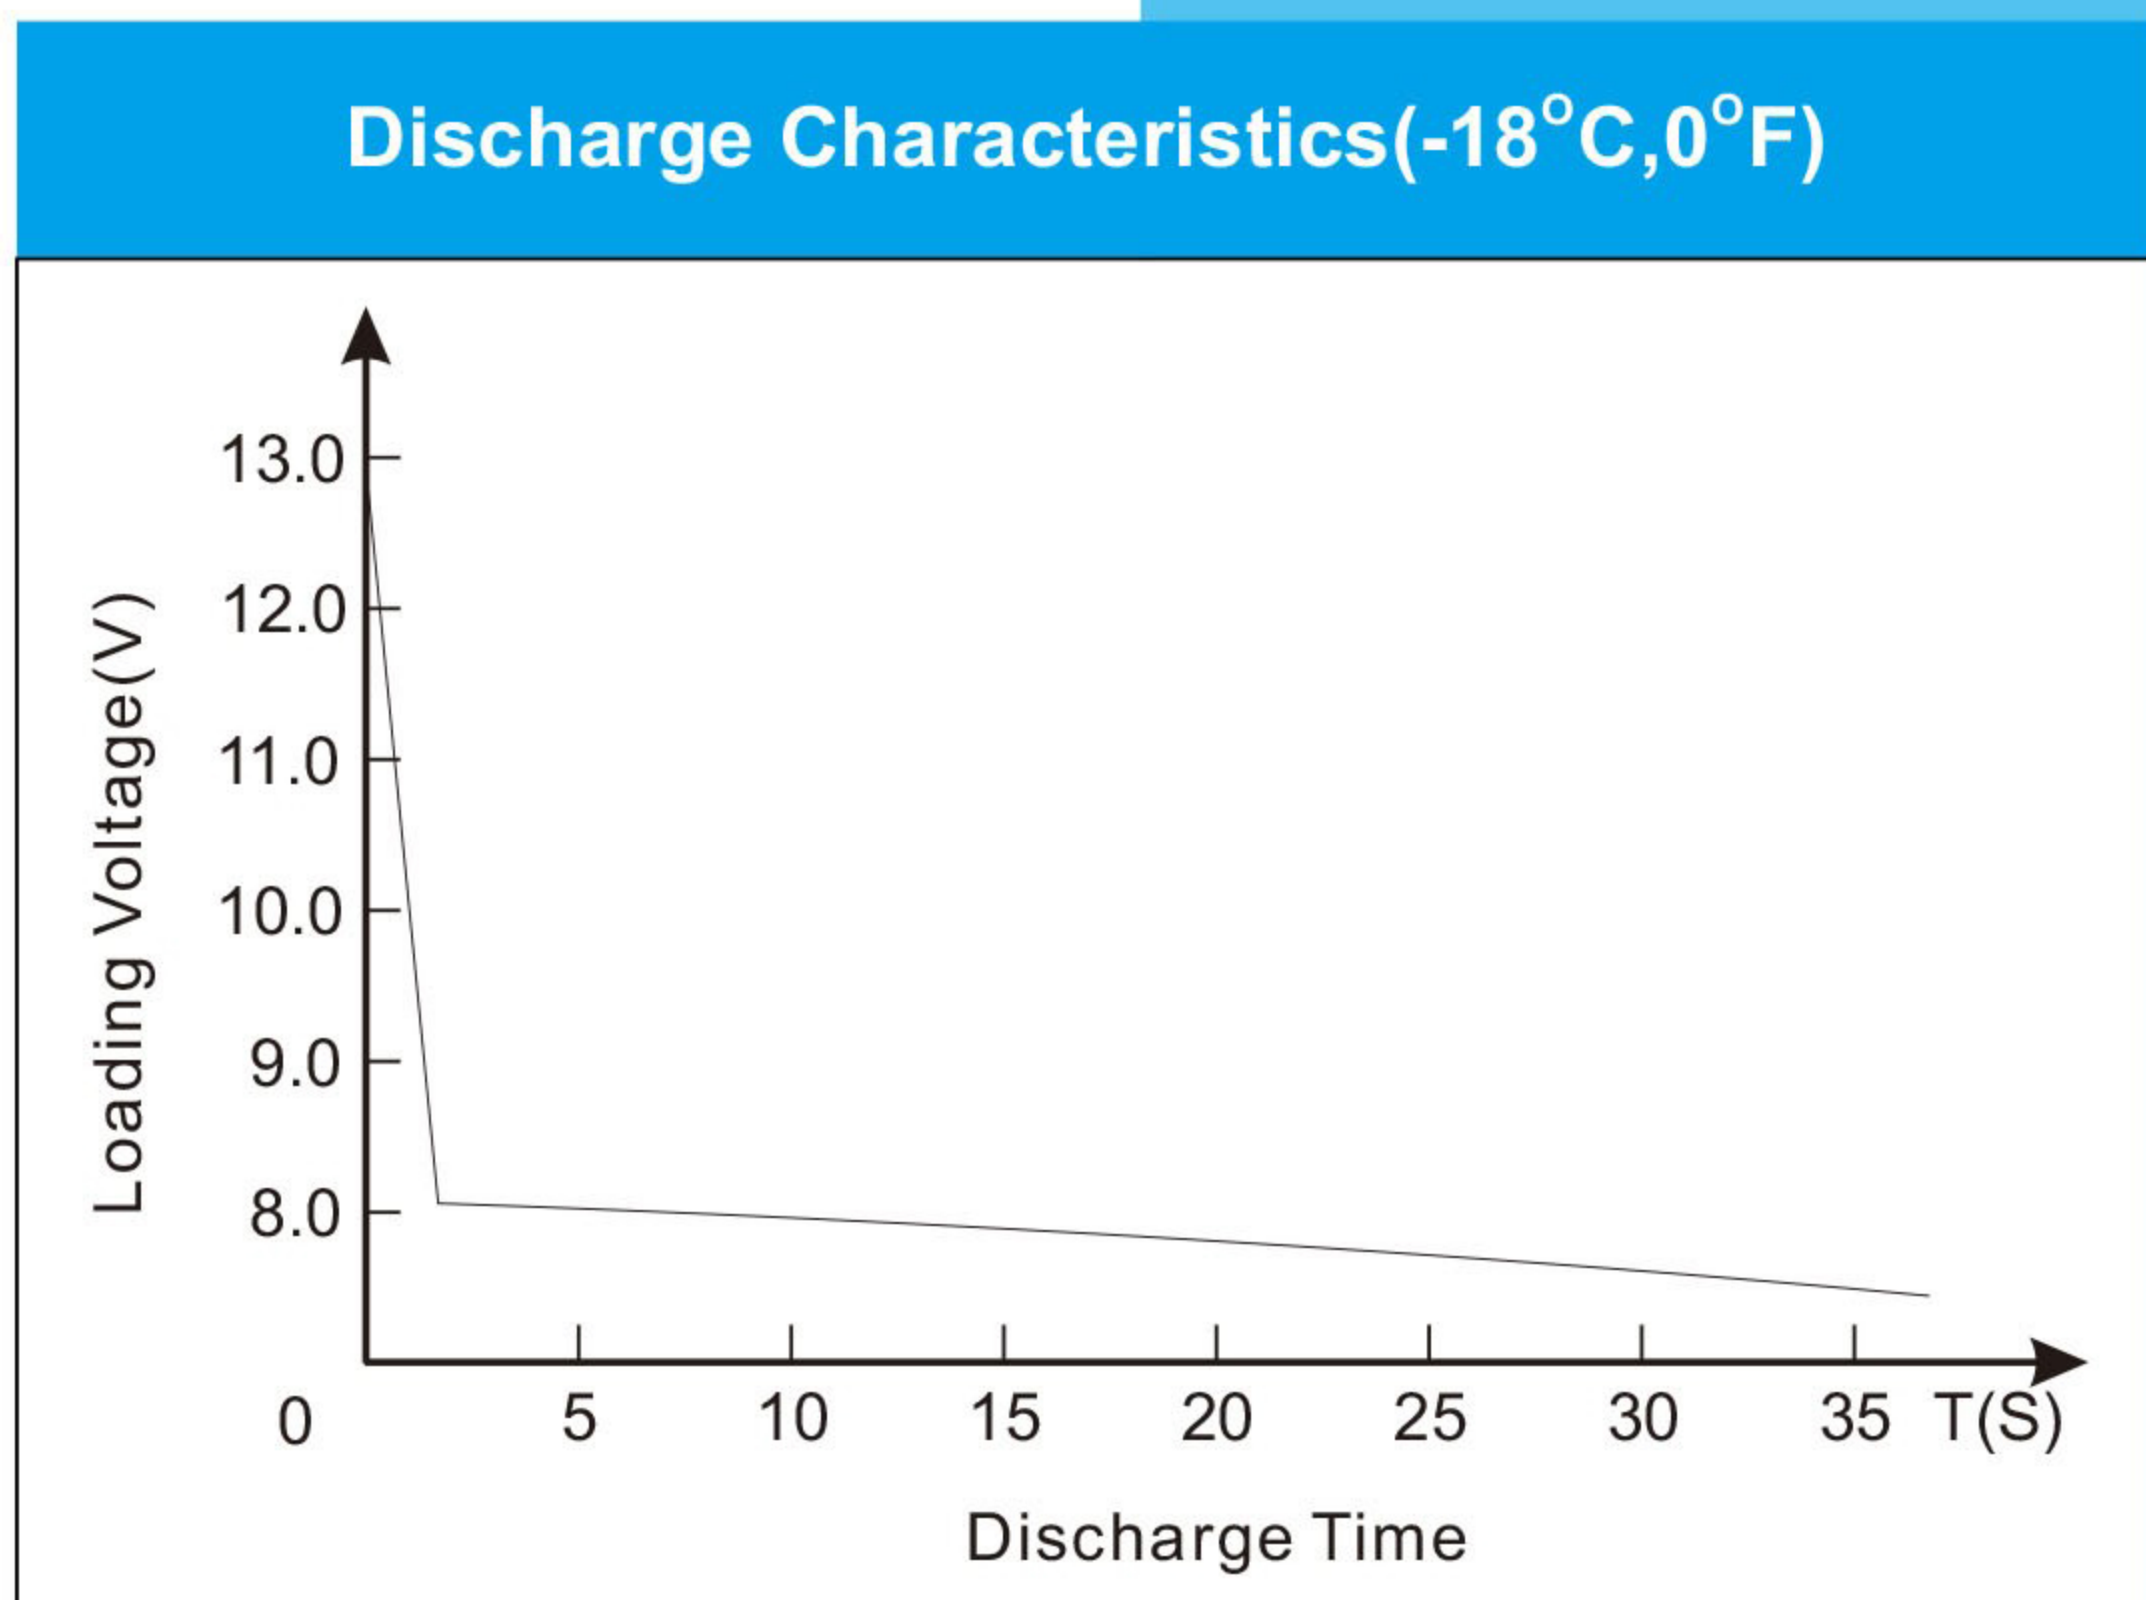

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.