


55017 [12V50Ah]



Dimensions (mm)

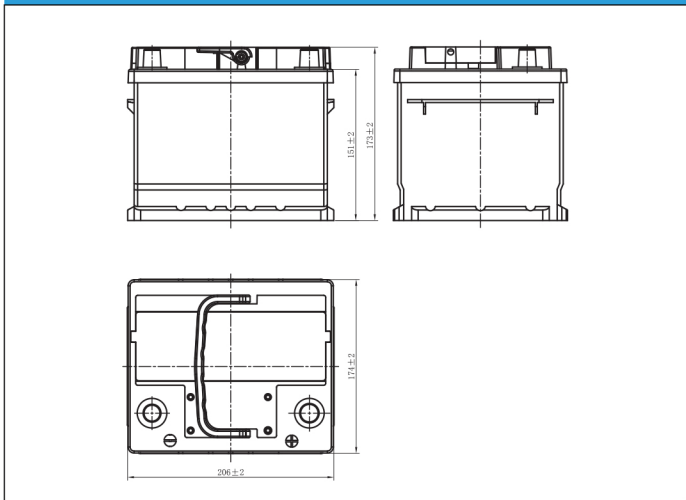


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		50Ah
Dimension	Length	207 ± 2mm(8.11inches)
	Width	175 ± 2mm(6.81inches)
	Container Height	175 ± 2mm(6.81inches)
	Total Height(with Terminal)	175 ± 2mm(6.81inches)
Weight		Approx11.4Kg(25.13lbs)
Acid		1.280 ± 0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		1
Hold-Down		B13
Cell plate qty		/
Case		Gray-PP Material
Cover		Gray-PP Material
Handle		Gray-PP Material
QTY/PLT/layer		/

Electrical Specification



Rated Capacity	20 hour rate(2.2A)	50Ah
Reserve Capacity		68min
Cold Cranking Performance Amps@0°F(-18°C)		400A

Discharge Characteristics(25°C,77°F)

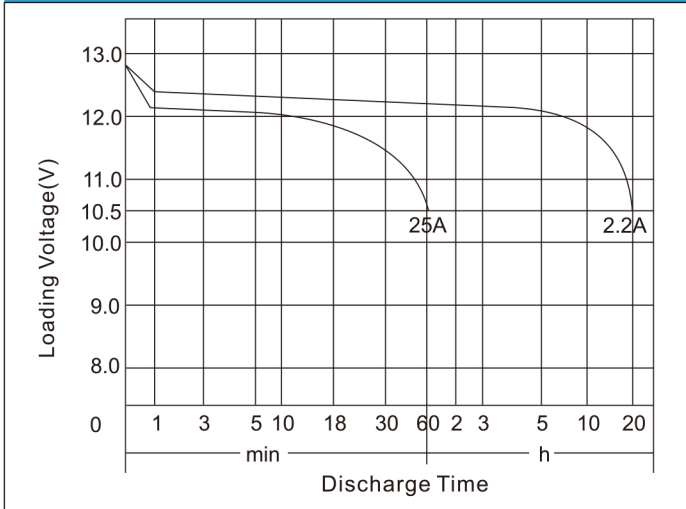


Standard Terminal (mm) Cell Layout

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Figure(0)

Discharge Characteristics(-18°C,0°F)

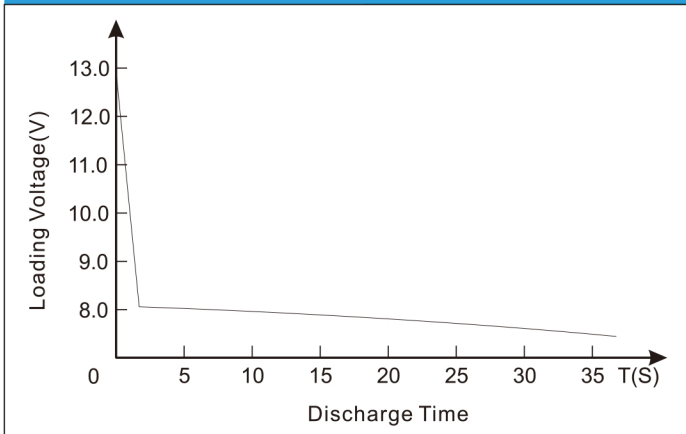

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.