


## NS40ENL[12V40Ah]



### Dimensions (mm)

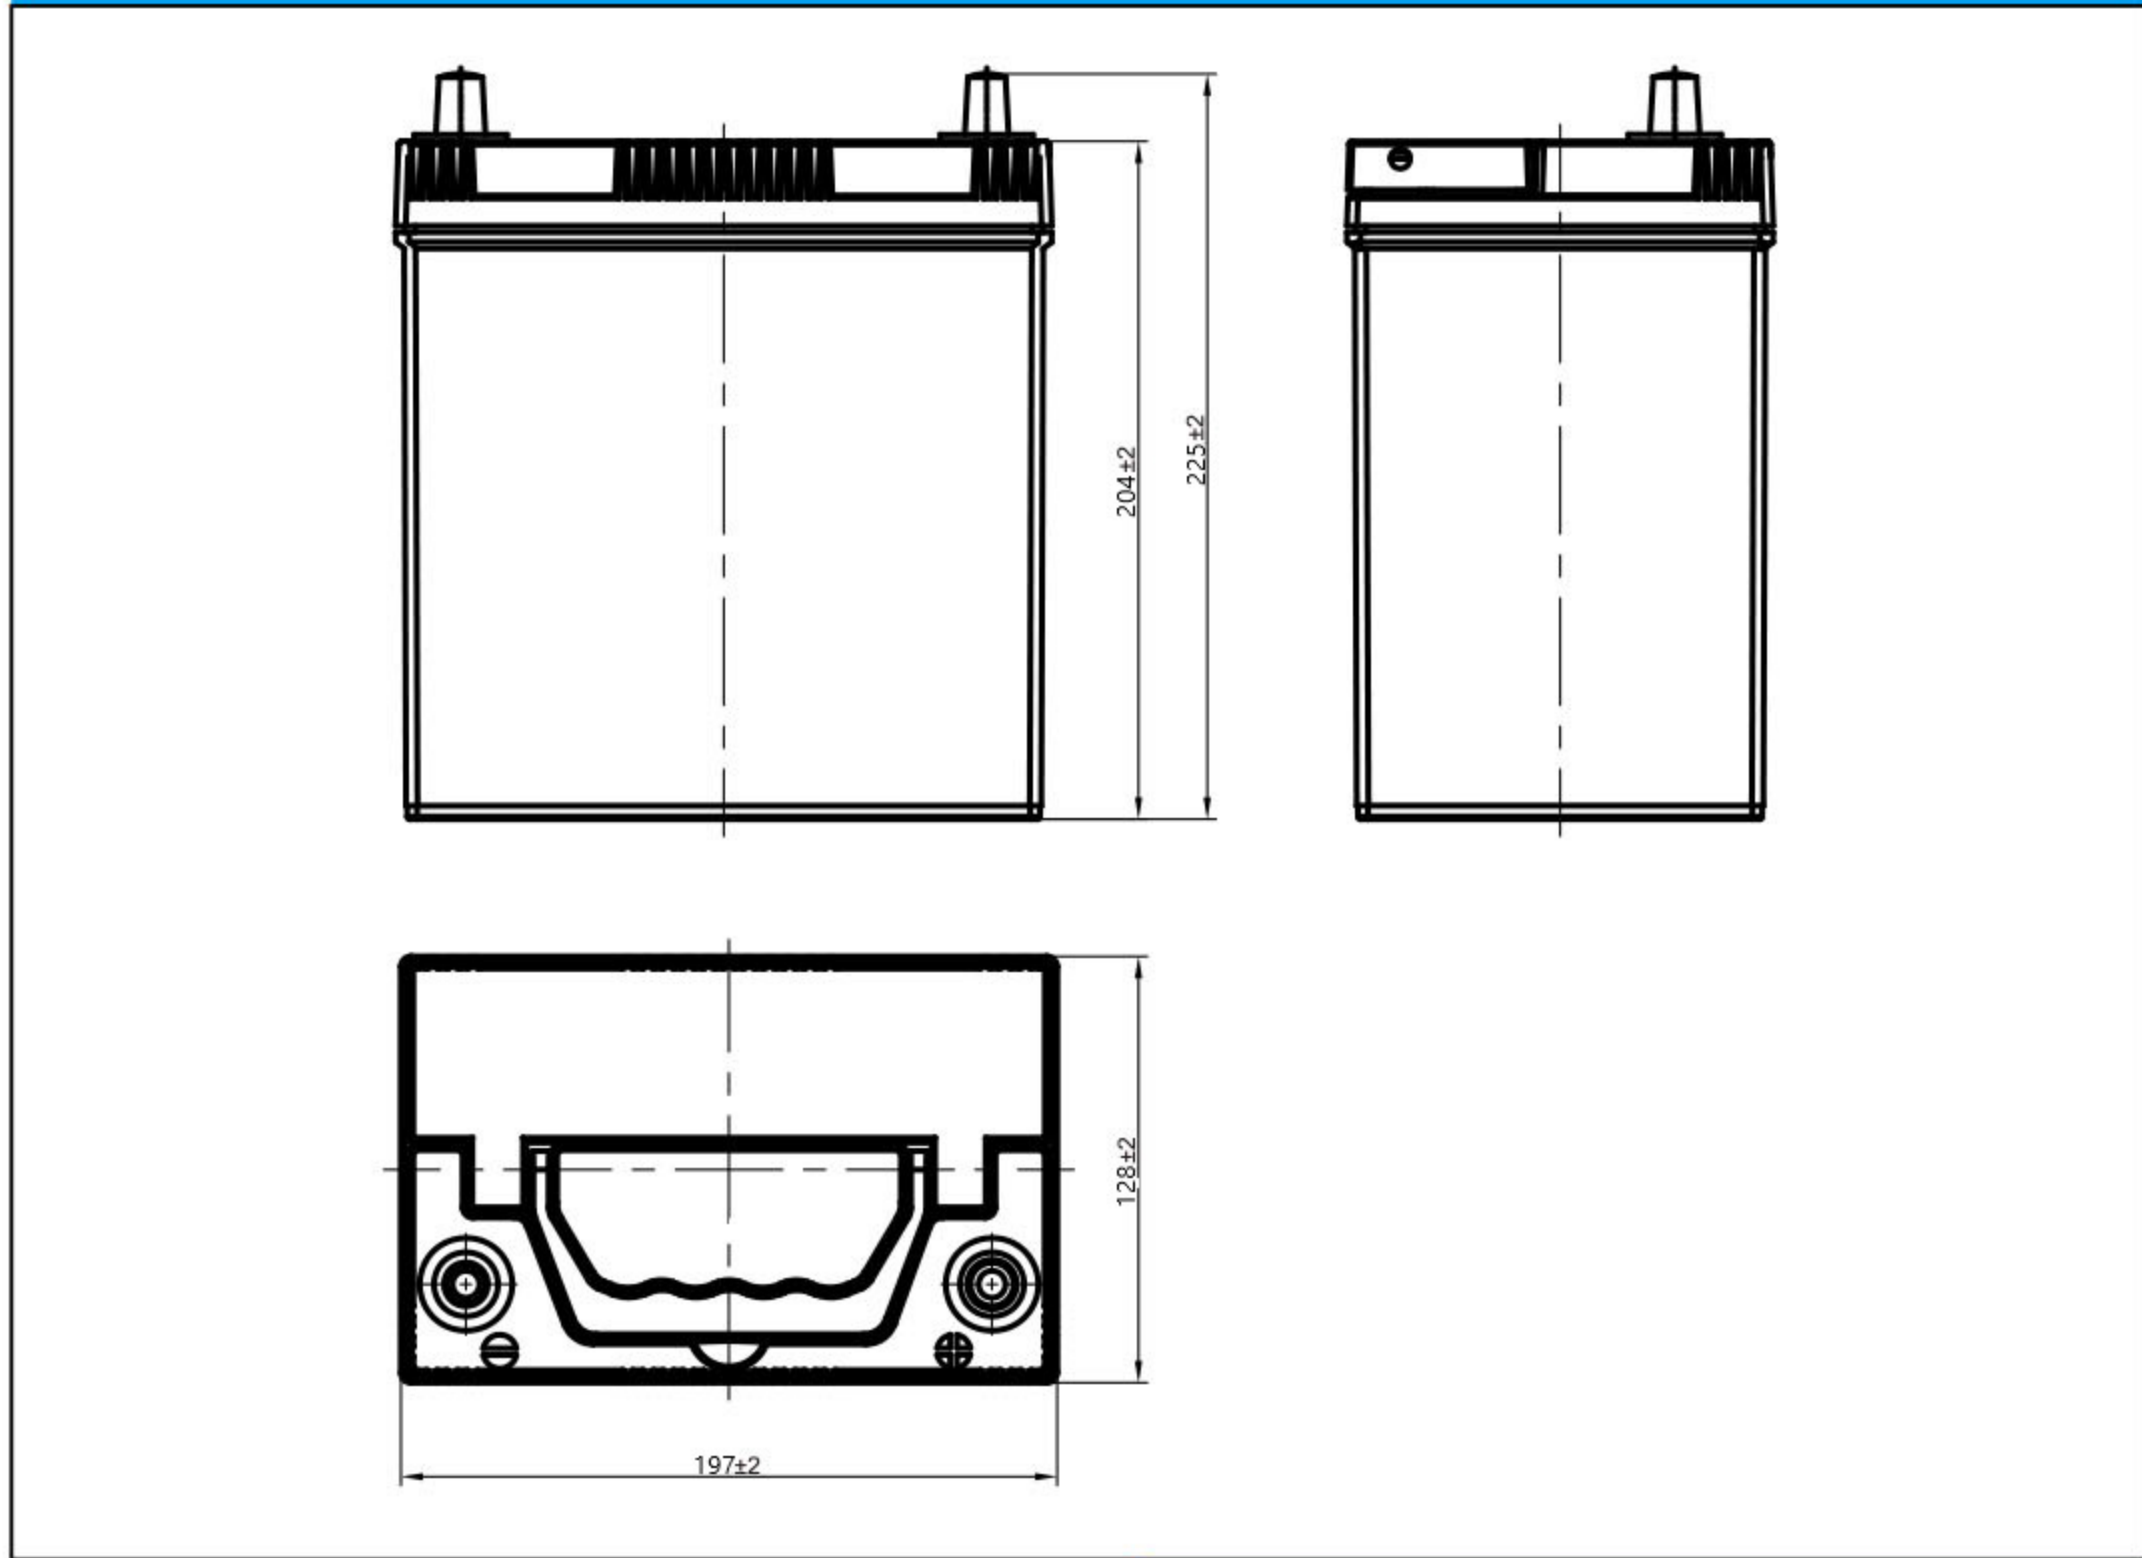


### Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		40Ah
Dimension	Length	197±2mm(7.68inches)
	Width	136±2mm(4.96inches)
	Container Height	204±2mm(7.91inches)
	Total Height(with Terminal)	225±2mm(8.74inches)
Weight		Approx10.3Kg(22.71lbs)
Acid		1.280±0.015g/cm <sup>3</sup> (25°C)
Standard Terminal		3
Cell layout		0
Hold-Down		B01
Cell plate qty		/
Case		Gray-PP Material
Cover		Gray-PP Material
Handle		Gray-PP Material
QTY/PLT/layer		/


### Electrical Specification

Rated Capacity	20 hour rate(1.8A)	40Ah
Reserve Capacity		54min
Cold Cranking Performance Amps@0°F(-18°C)		340A


### Discharge Characteristics(25°C,77°F)

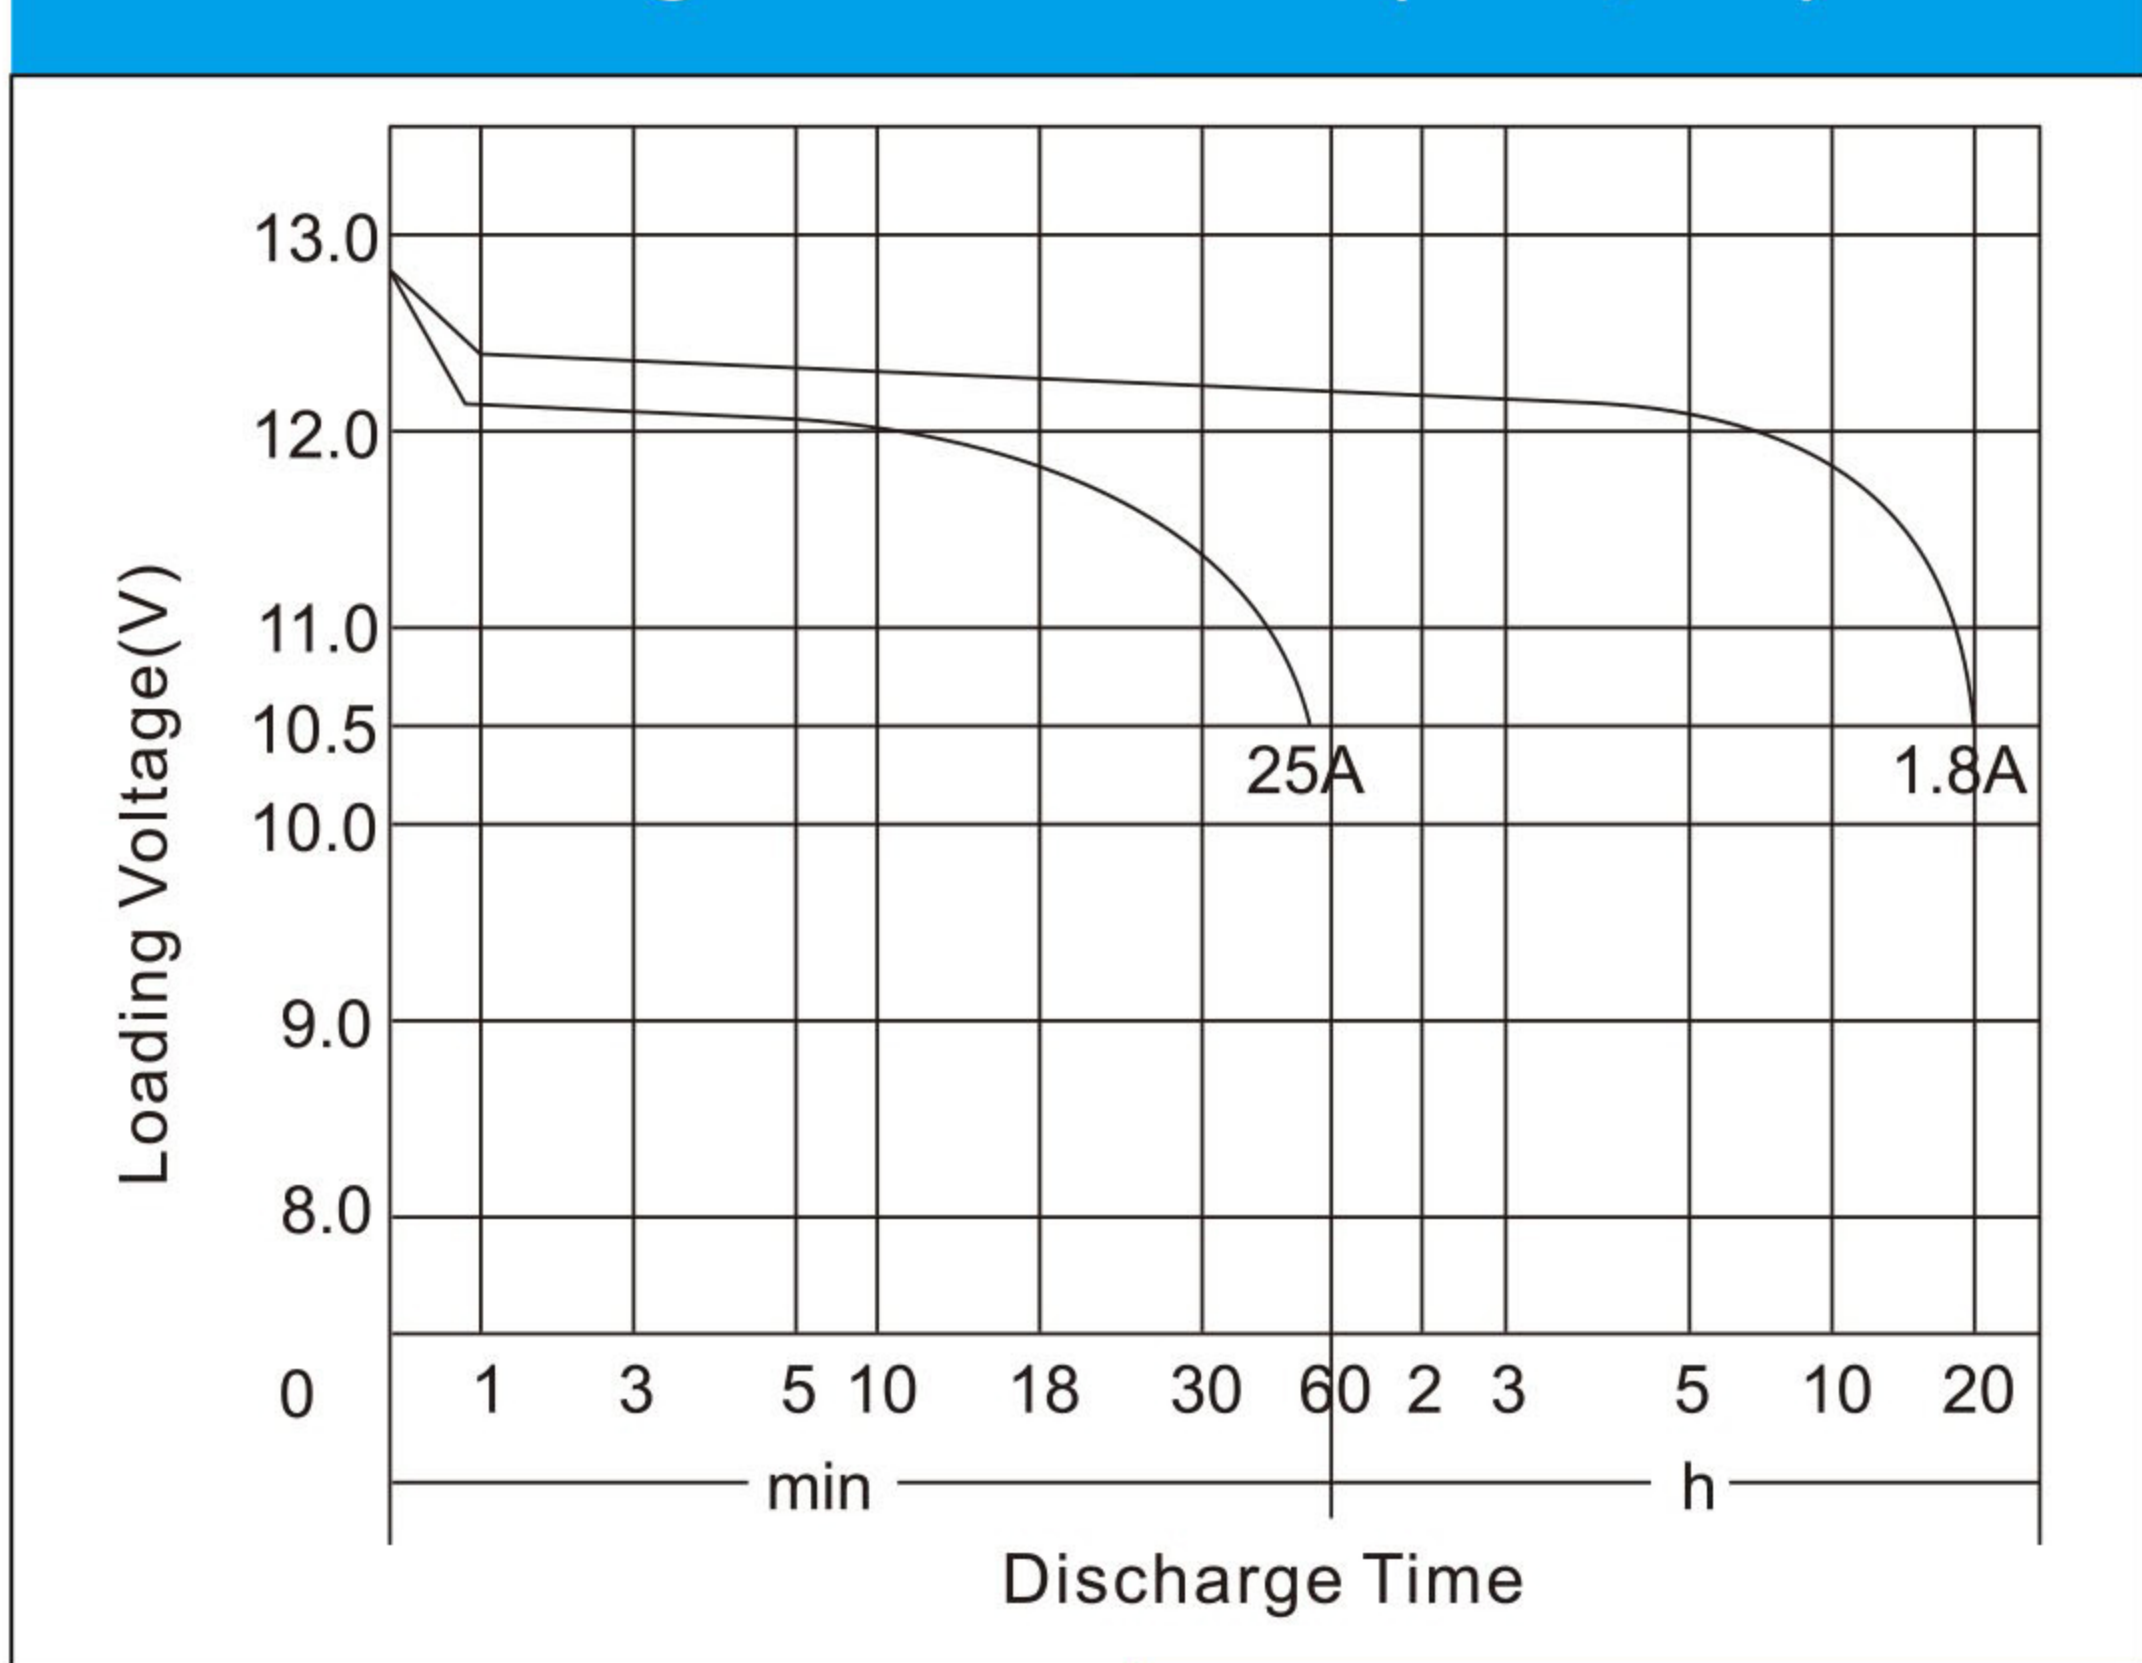

### Standard Terminal (mm)      Cell Layout

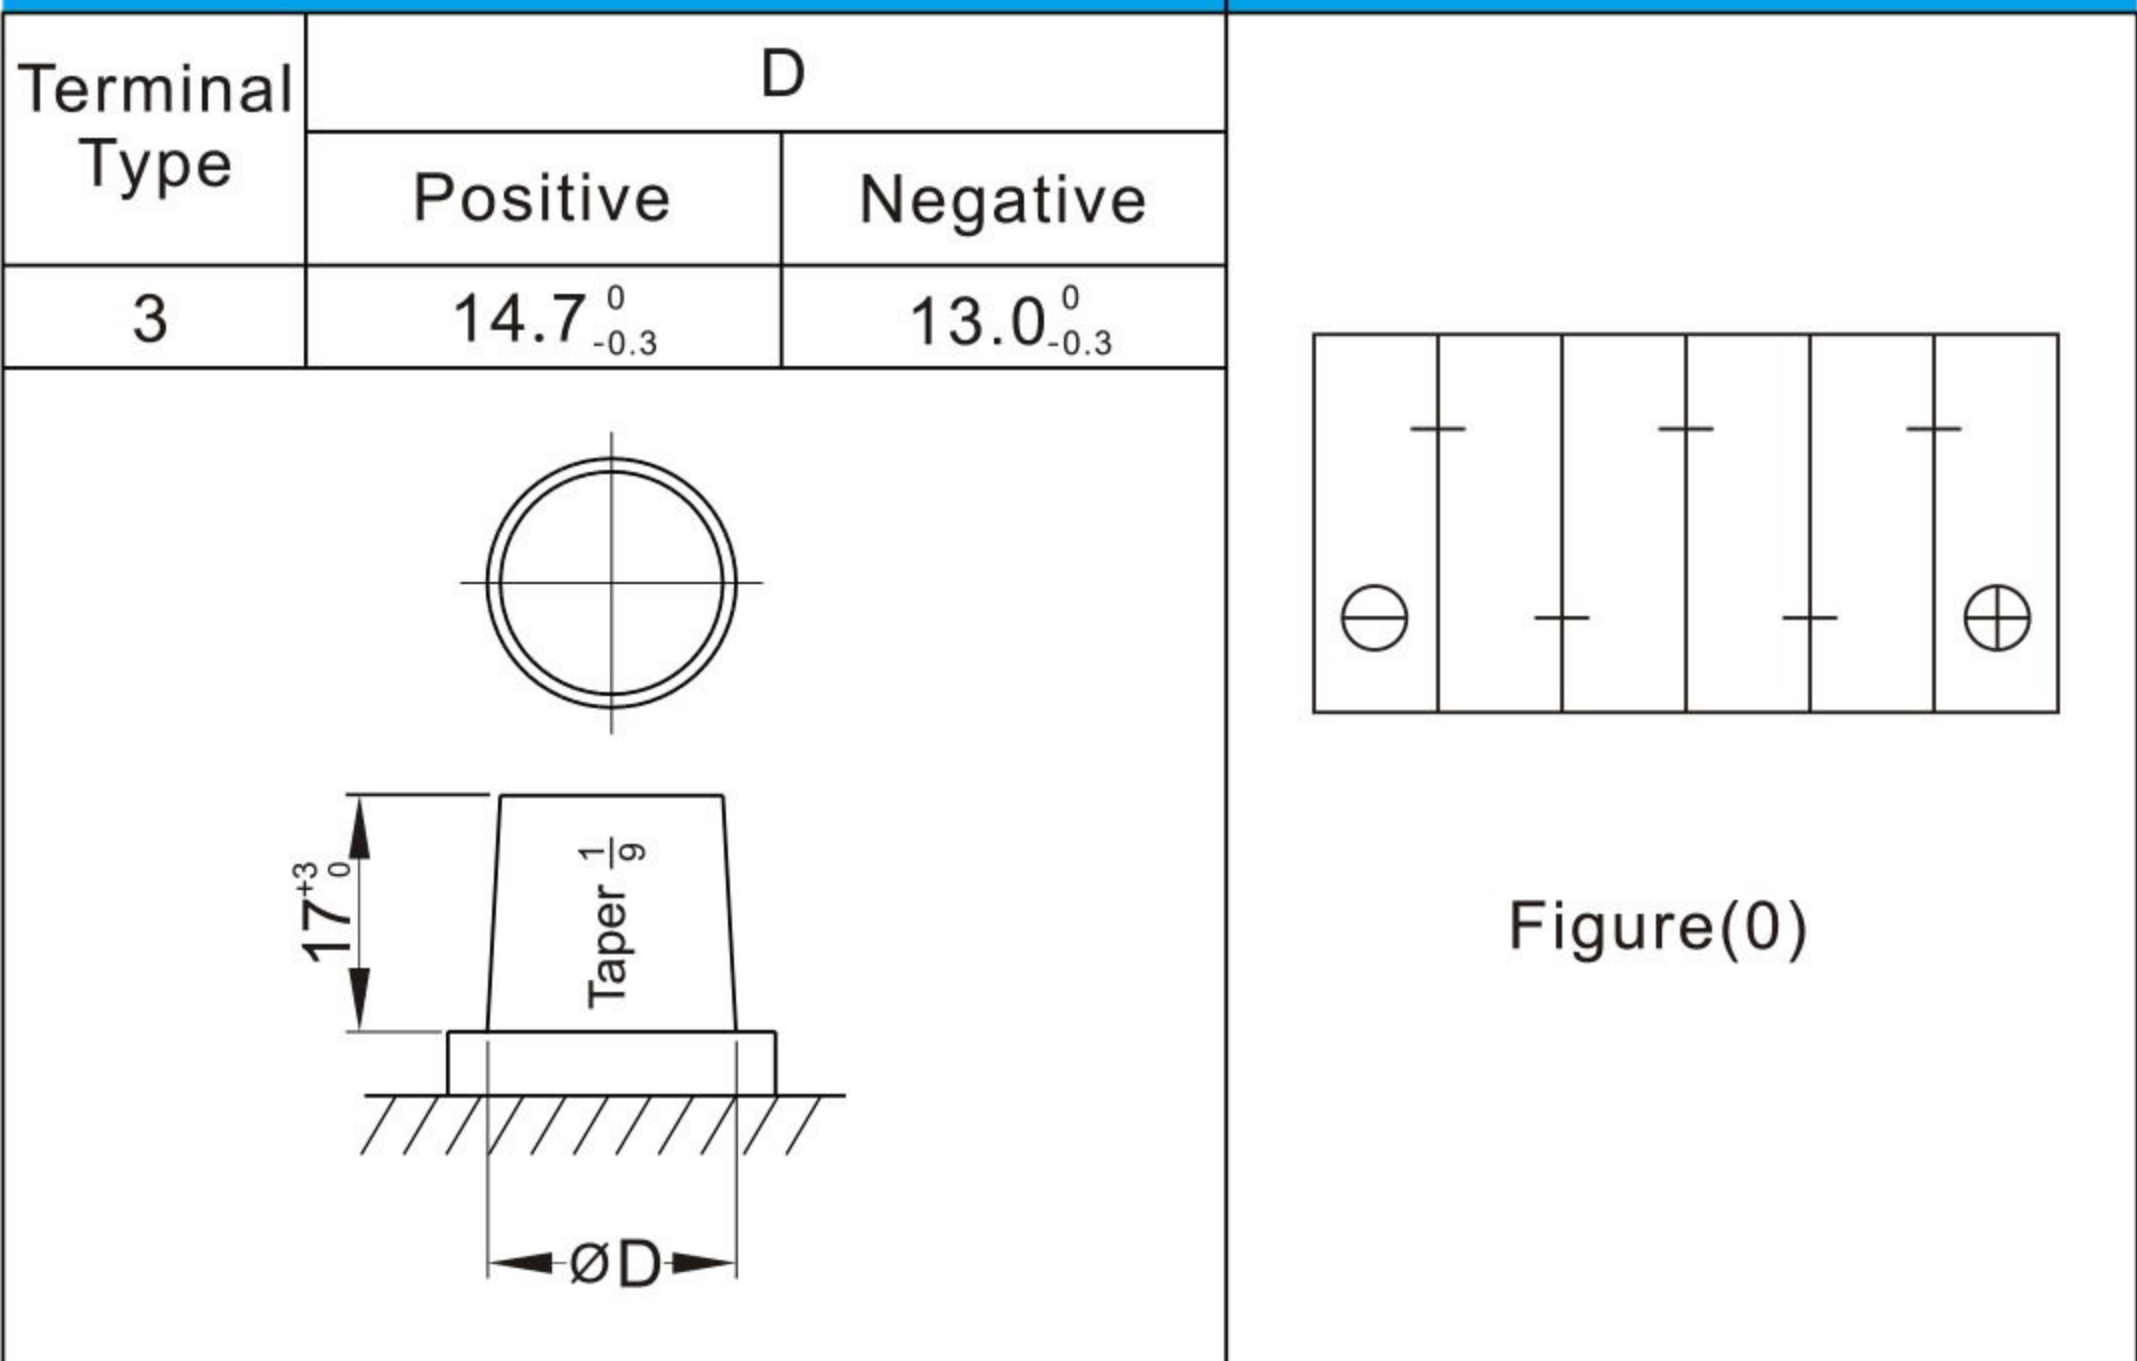

### Discharge Characteristics(-18°C,0°F)

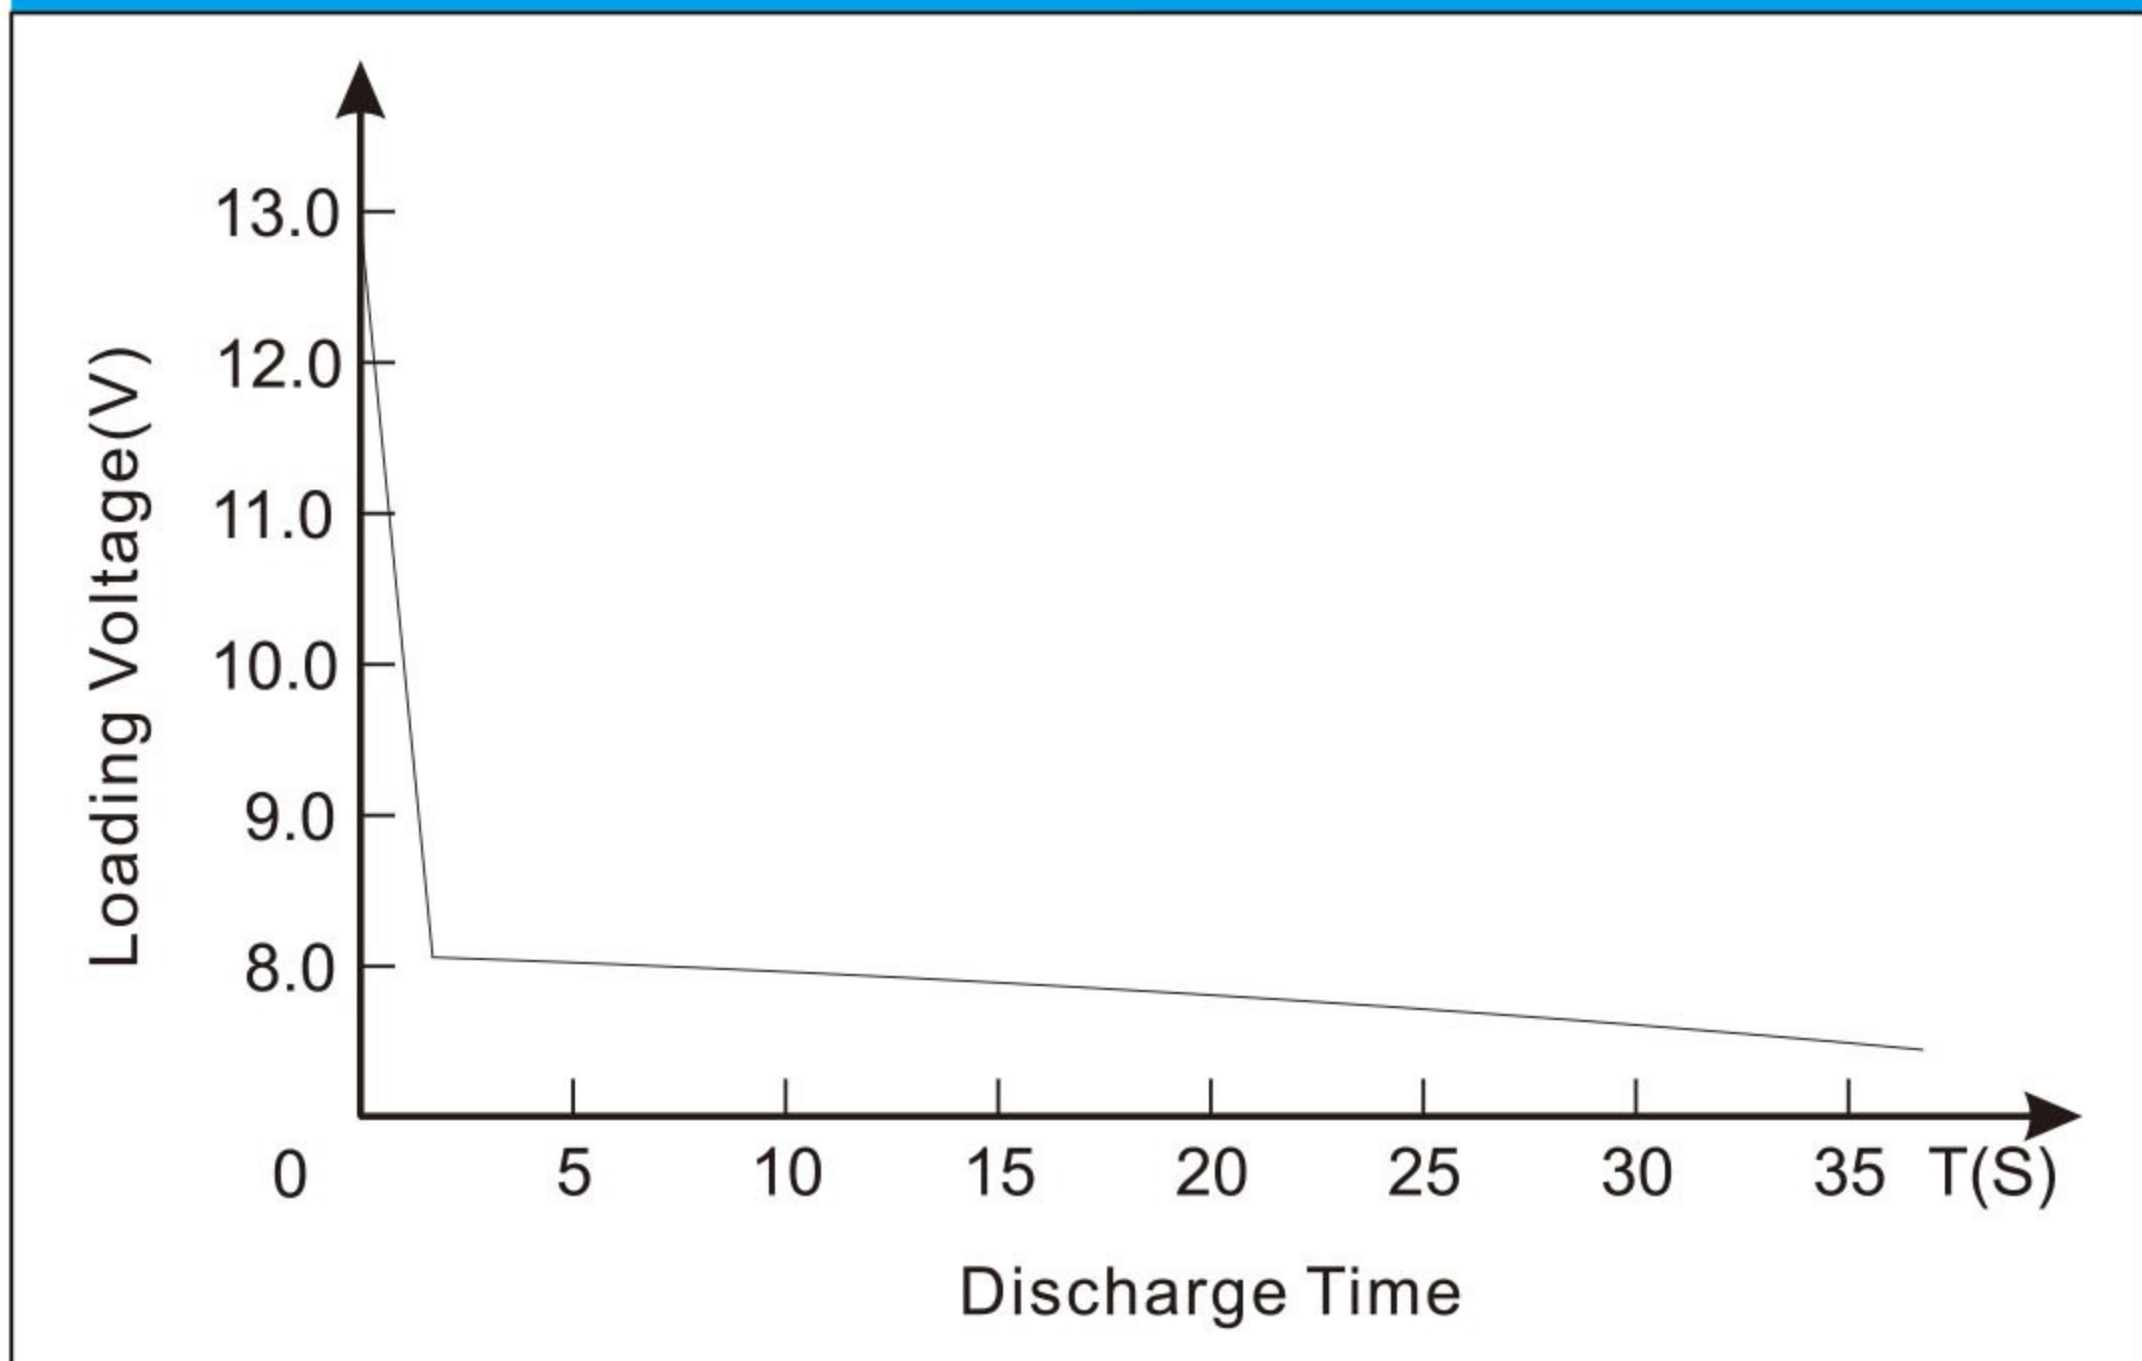

\*Values are subject to variation of +/- 5% in normal manufacturing processes.  
\*Technical specifications and the product line above could be changed without prior notice.