





Ideal for the following applications



Special Features



Dimensions (mm)

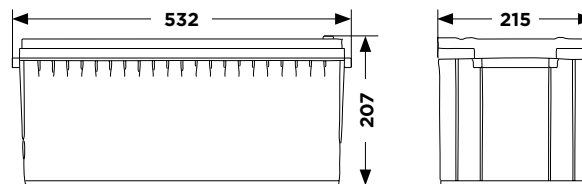

Technical Specification

Nominal Voltage	38.4V
Nominal Capacity	60Ah
Max. Continuous Output Power	2304Wh
Max. Expansion	4P - 4 in Parallel
Cycle Lifespan	4.000 cycles @ 100% DOD
	6.000 cycles @ 80% DOD
	15.000 cycles @ 60% DOD
Material	Plastic - ABS

Physical Specification

Dimensions	Length	532mm
	Width	207mm
	Height	215mm
Weight	Approx 19.7Kg	
Terminal	M8 screw	
IP Rate	IP65	

BMS - Building Management System

BMS	120A
Max. Continuous Output Power	3000W Golf Car 4608W Solar
Max. Continuous Charging Current	60A
Max. Continuous Discharge Current	120A
Max. Discharge Current 1 Second	550A
Charging method	CC/CV
Charging voltage	43.2V ± 0.6V
Recommended charging current	12A (0.2C)

Temperature

Charging temperature	0°C to 50°C
Discharge temperature	-20°C to 60°C
Storage temperature	-10°C to 50°C