


## 64020 [12V140Ah]



### Dimensions (mm)

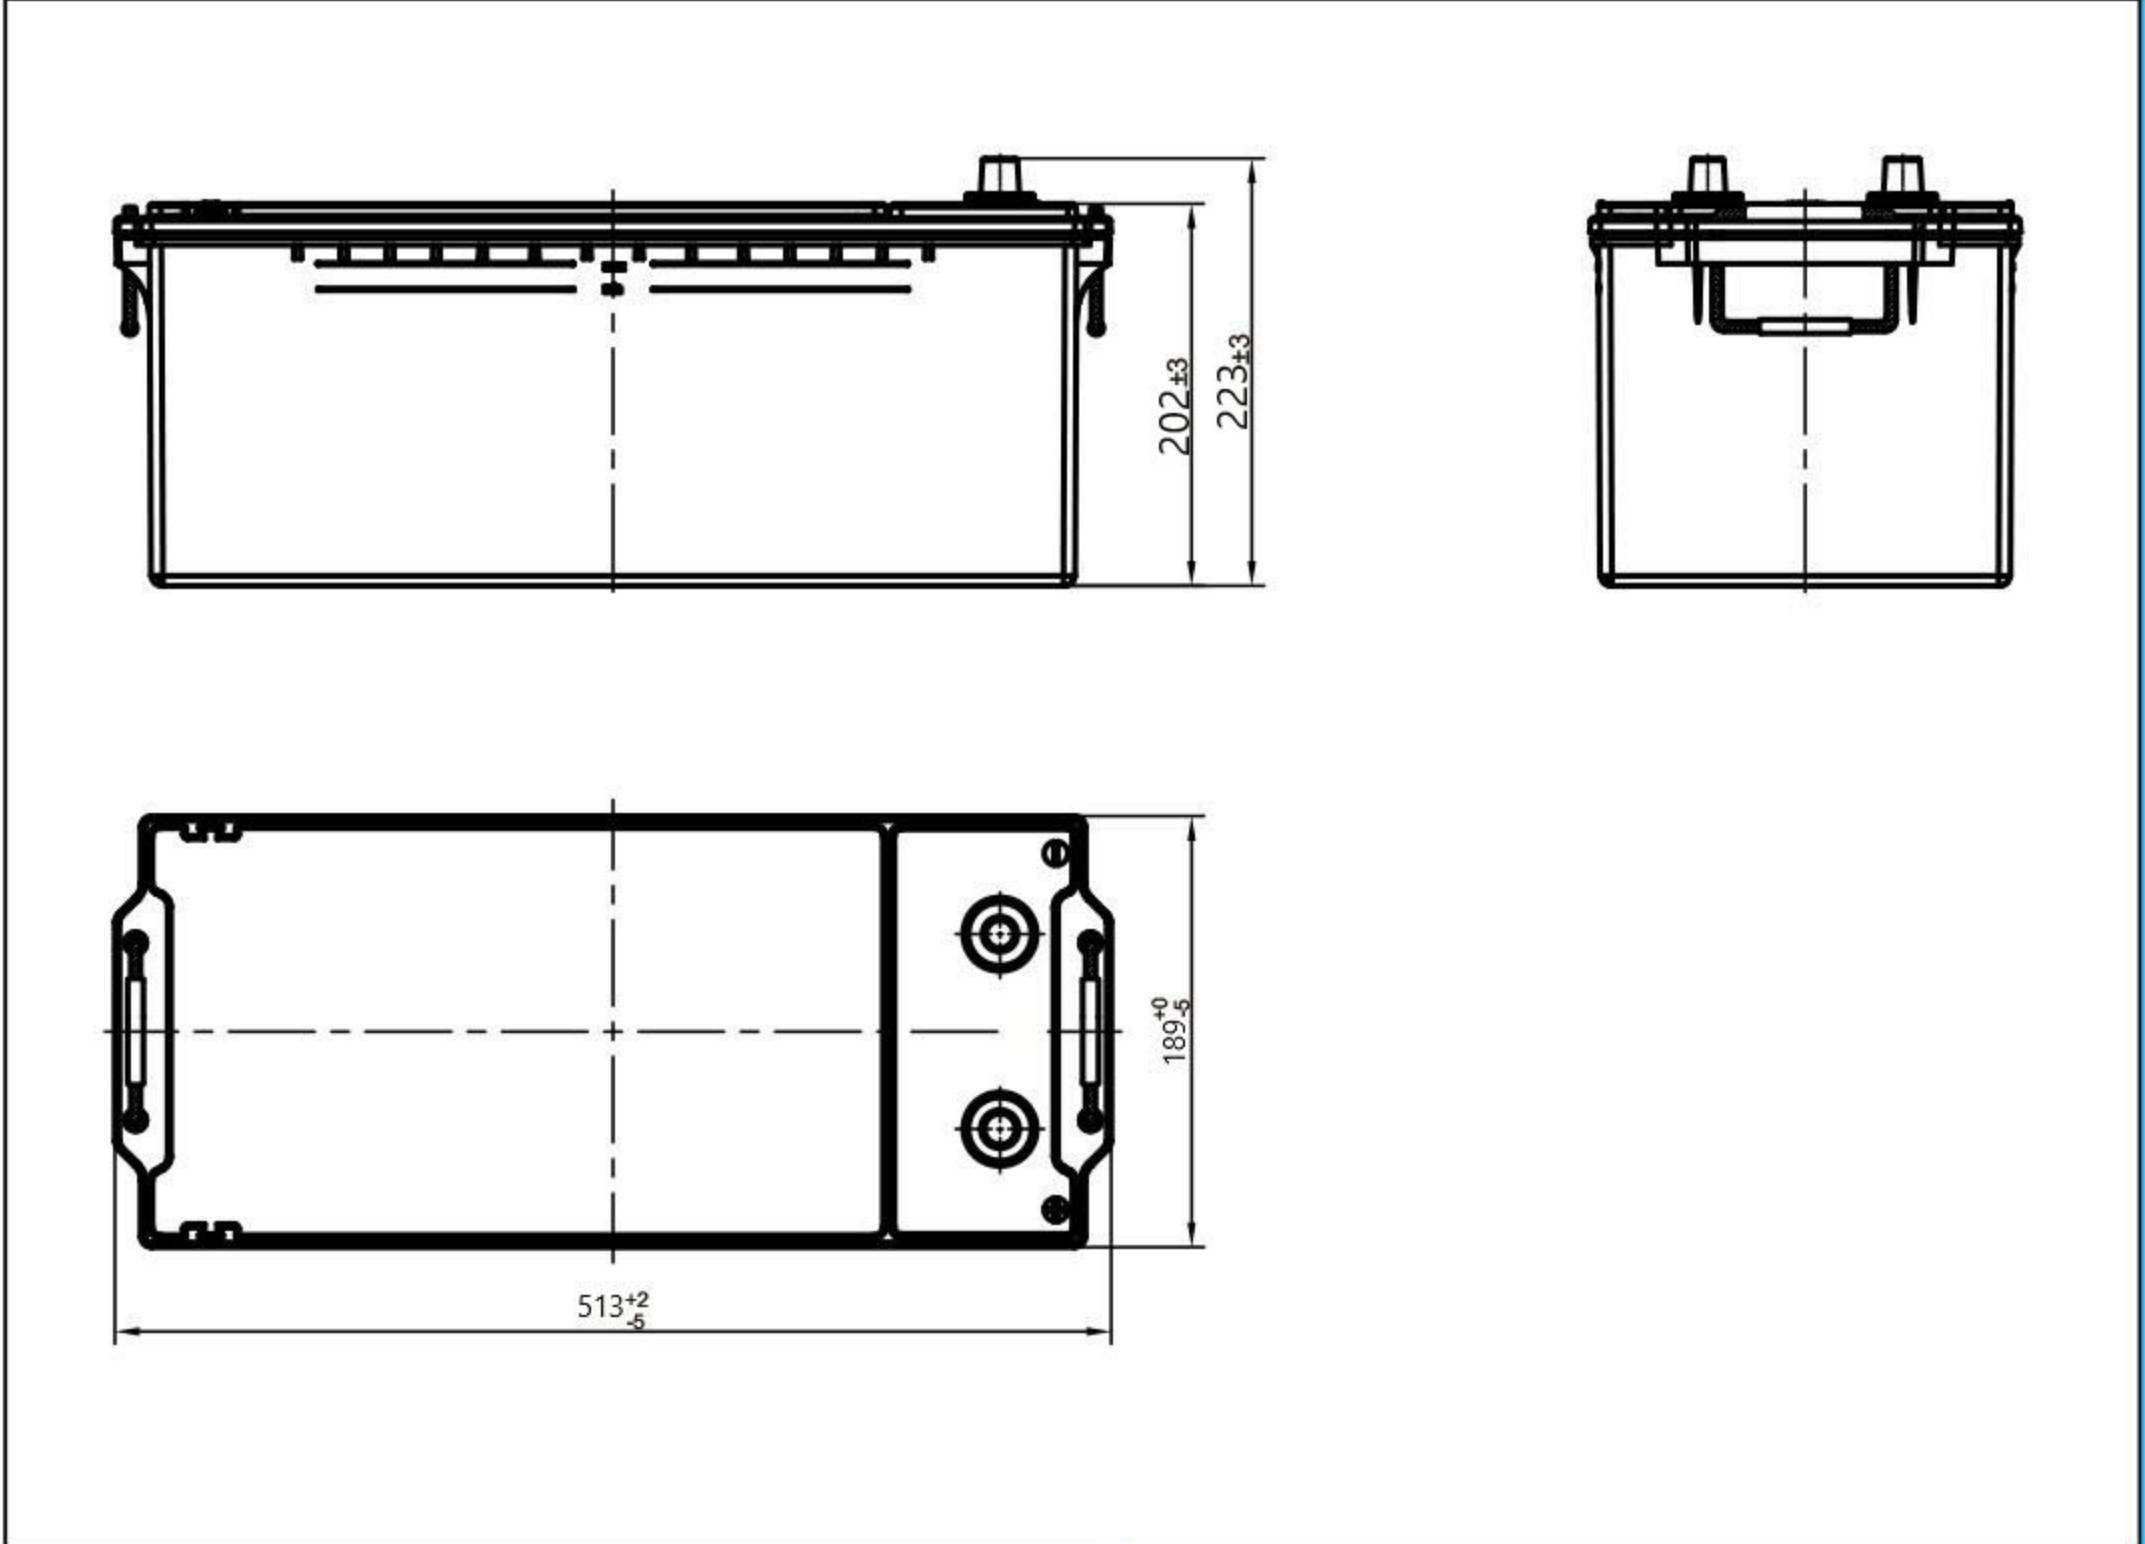


### Physical Specification (mm)

Nominal Voltage	12V	
Nominal Capacity(20HR)	140Ah	
Dimension	Length	513+2/-5mm(20.08inches)
	Width	189+0/-5mm(8.74inches)
	Container Height	202±3mm(7.72inches)
	Total Height(with Terminal)	223±3mm(8.54inches)
Weight	Approx34Kg(74.96lbs)	
Acid	1.280±0.015g/cm <sup>3</sup> (25°C)	
Standard Terminal	1	
Cell layout	3	
Hold-Down	B0	
Cell plate qty	/	
Case	Gray-PP Material	
Cover	Gray-PP Material	
Handle	Black-PP Material	
QTY/PLT/layer	/	

### Electrical Specification

Rated Capacity	20 hour rate(6.75A)	140Ah
Reserve Capacity		256min
Cold Cranking Performance Amps@0°F(-18°C)		860A


### Discharge Characteristics(25°C,77°F)

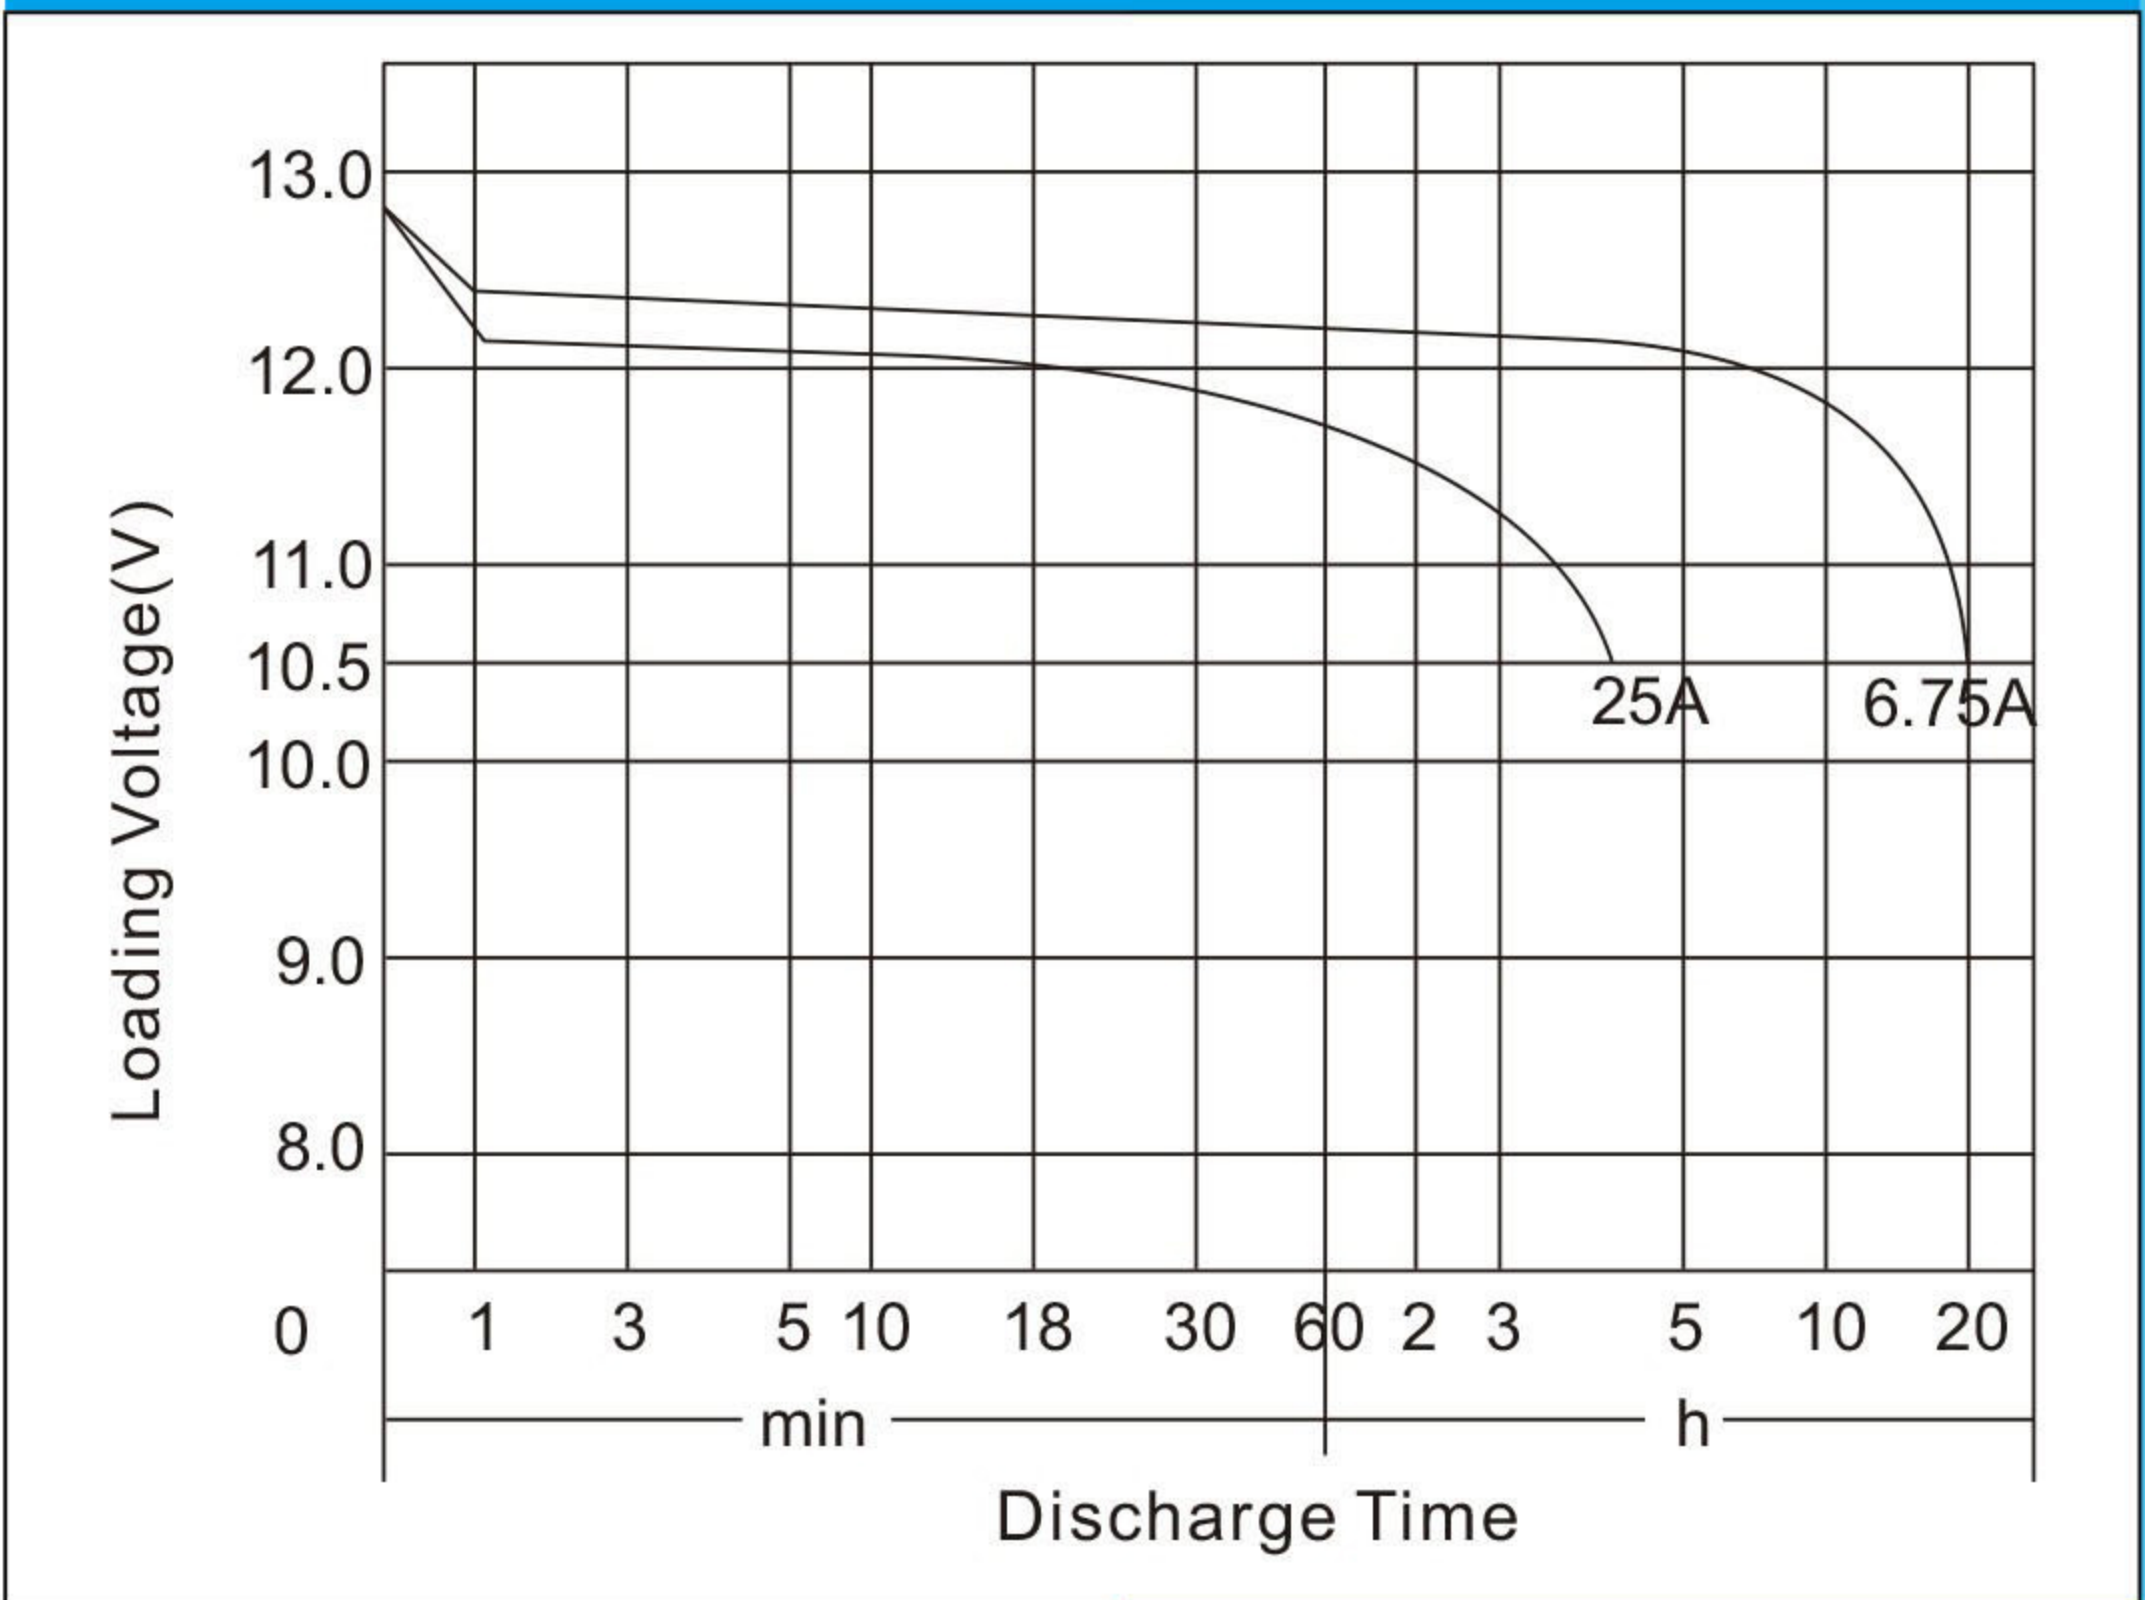


### Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 <sup>0</sup> <sub>-0.3</sub>	17.9 <sup>0</sup> <sub>-0.3</sub>

### Cell Layout

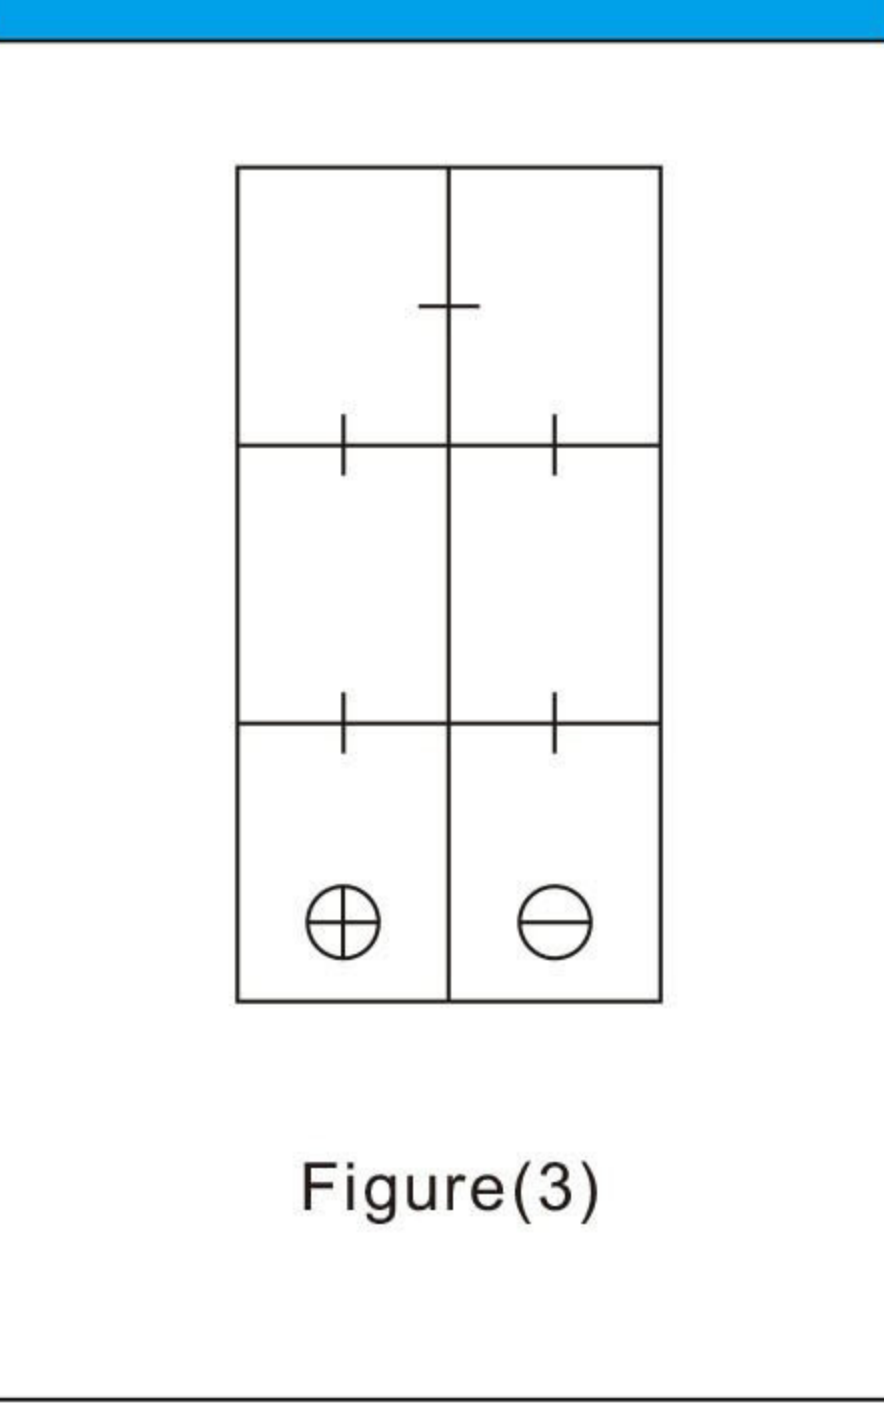

### Discharge Characteristics(-18°C,0°F)

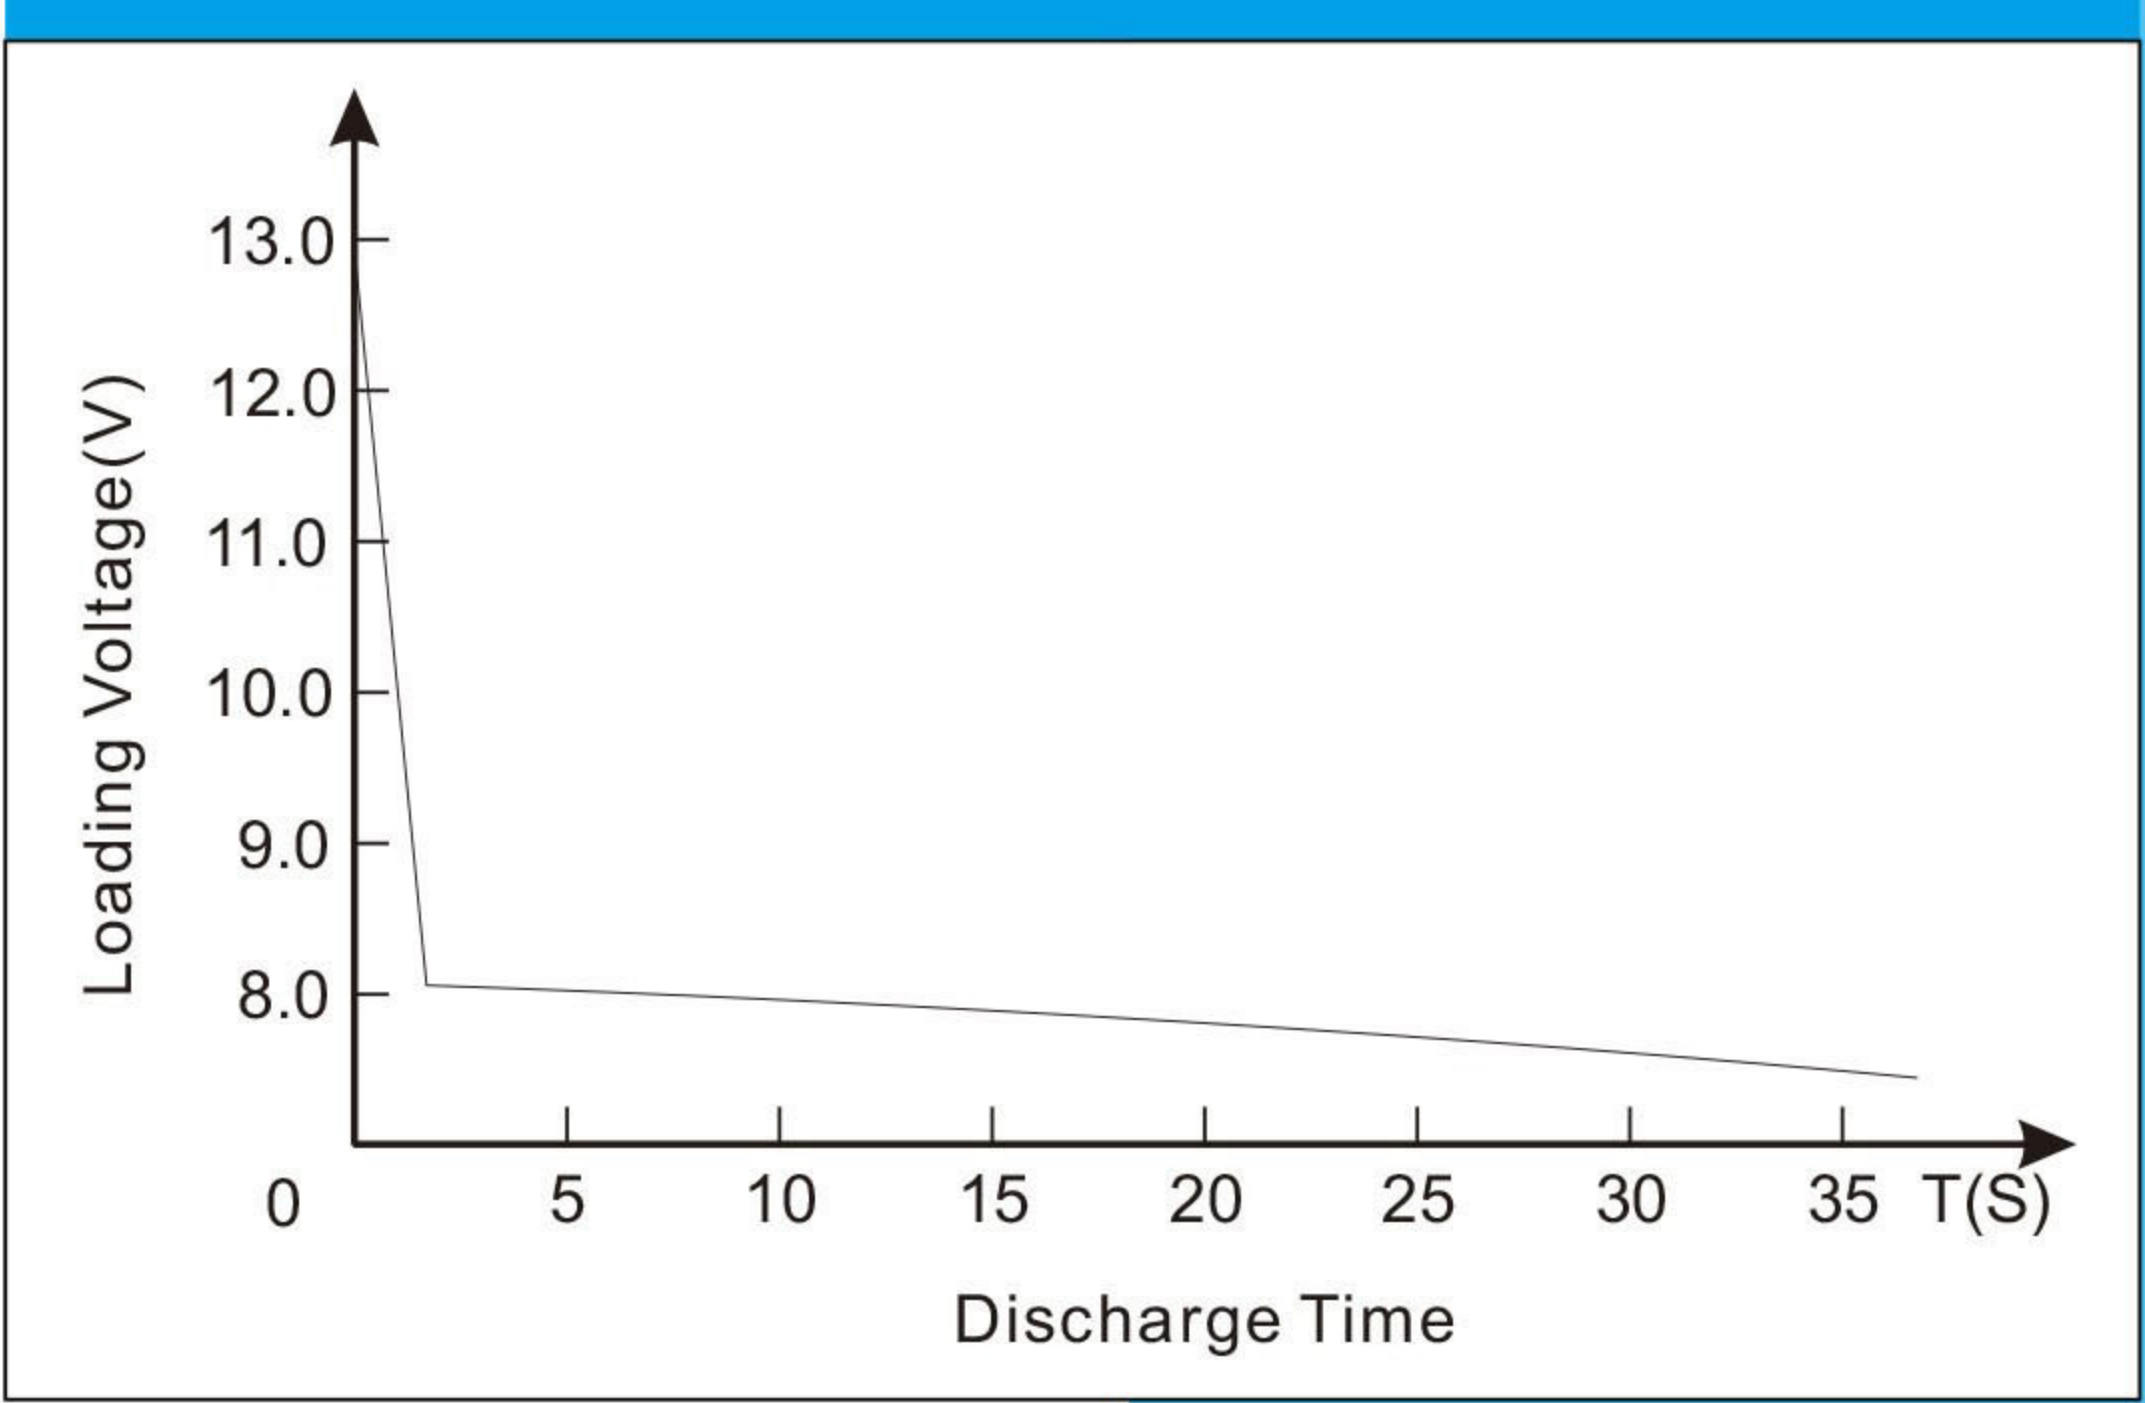

\*Values are subject to variation of +/- 5% in normal manufacturing processes.  
 \*Technical specifications and the product line above could be changed without prior notice.